


SPECIFICATION DATA

TR-000-01-11 Single Job Box

Key Features

- Streamlined Design
- Added safety features including 3 point positive locking breaks and engagement arm lock
- Support for 3 workers on fall arrest and 2 workers on fall restraint
- Flat free tires with roller bearings for ease of use
- Advanced standard options:
 - fork pockets
 - 4 corner D-Rings for hoisting and securing
- US Patent-8.240.431 B2
- Compliant with OSHA regulation 1926.502(d)

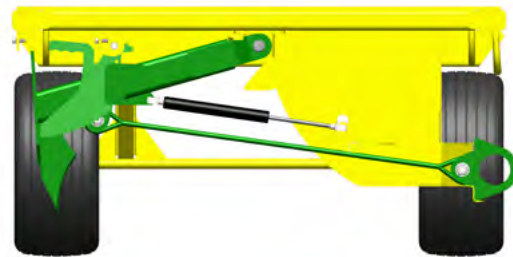

Available Options



RAPTOR ALERT™
Fall warning system includes 130 decible siren and amber strobe light
RAS-000-09



JOB BOXES
Item:
20 & 21 CBF



RAPTOR RESCUE™
Fall retrieval system provides for prompt rescue of fallen workers.
RMS-000-12



SRL TRAY
For upright positioning of SRL's off the roof surface.
SLR-000-13

TRIREX™ TR-000-01-11 Single Job Box



DIMENSIONS

Length	78" without handle attached; 111" with handle attached
Width	48"
Height	53"
Weight	1003 LBS
Tires	Solid Polyurethane 18" x 8.5" x 8" flat free tires; roller bearings
Tire Foot Print	3" x 5"
Approximate Downforce Applied	16.71 PSI
Approximate Weight Per Tire	250.75 LBS
Platform Size	29" x 47"
Height of Platform (from ground)	24"
Ground Clearance	5 1/2"
Warranty	Manufacturer's limited warranty covers any defect in workmanship or materials for one year from date of purchase

STANDARD JOB BOX


Dimensions	47.5"w x 30"d x 24"h
Capacity	20 cubic feet
Weight	140 LBS
Description	16 guage solid steel construction; powder coated inside and out
Weight Carry Capacity of Trailer	2000 LBS gross weight rating
Fall Arrest Capacity	Three Workers
Fall Restraint Capacity	Two Workers
Fall Protection Standards	OSHA 1926.502(d) Fall Arrest Anchor

SPECIFICATION DATA

TR-000-02-11 Double Job Box (Small)

Key Features

- Streamlined Design
- Added safety features including 3 point positive locking breaks and engagement arm lock
- Support for 3 workers on fall arrest and 2 workers on fall restraint
- Flat free tires with roller bearings for ease of use
- Advanced standard options:
 - fork pockets
 - 4 corner D-Rings for hoisting and securing
- US Patent-8.240.431 B2
- Compliant with OSHA regulation 1926.502(d)

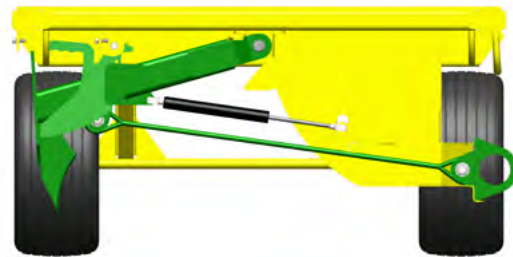

Available Options



RAPTOR ALERT™
Fall warning system includes 130 decible siren and amber strobe light
RAS-000-09



RAPTOR RESCUE™
Fall retrieval system provides for prompt rescue of fallen workers.
RMS-000-12



SRL TRAY
For upright positioning of SRL's off the roof surface.
SLR-000-13

TRIREX™ TR-000-02-11 Double Job Box (Small)



DIMENSIONS

Length	78" without handle attached; 111" with handle attached
Width	48"
Height	53"
Weight	1088 LBS
Tires	Solid Polyurethane 18" x 8.5" x 8" flat free tires; roller bearings
Tire Foot Print	3" x 5"
Approximate Downforce Applied	18.133 PSI
Approximate Weight Per Tire	250.75 LBS
Platform Size	29" x 47"
Height of Platform (from ground)	24"
Ground Clearance	5 1/2"
Warranty	Manufacturer's limited warranty covers any defect in workmanship or materials for one year from date of purchase

STANDARD JOB BOX

Dimensions	47.5"w x 30"d x 24"h
Capacity	20 cubic feet
Weight	140 LBS
Description	16 guage solid steel construction; powder coated inside and out

SMALL JOB BOX


Dimensions	24"w x 30"d x 24"h
Capacity	12 cubic feet
Weight	85 LBS
Description	16 guage solid steel construction; powder coated inside and out
Weight Carry Capacity of Trailer	2000 LBS gross weight rating
Fall Arrest Capacity	Three Workers
Fall Restraint Capacity	Two Workers
Fall Protection Standards	OSHA 1926.502(d) Fall Arrest Anchor

SPECIFICATION DATA

TR-000-03-11 Double Job Box (Large)

Key Features

- Streamlined Design
- Added safety features including 3 point positive locking breaks and engagement arm lock
- Support for 3 workers on fall arrest and 2 workers on fall restraint
- Flat free tires with roller bearings for ease of use
- Advanced standard options:
 - fork pockets
 - 4 corner D-Rings for hoisting and securing
- US Patent-8.240.431 B2
- Compliant with OSHA regulation 1926.502(d)

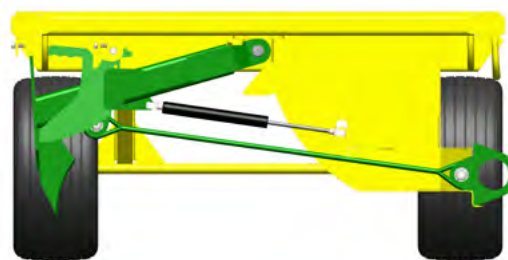

Available Options



RAPTOR ALERT™
Fall warning system includes 130 decible siren and amber strobe light
RAS-000-09



RAPTOR RESCUE™
Fall retrieval system provides for prompt rescue of fallen workers.
RMS-000-12



SRL TRAY
For upright positioning of SRL's off the roof surface.
SLR-000-13

TRIEX™ TR-000-03-11 Double Job Box (Large)



DIMENSIONS

Length	78" without handle attached; 111" with handle attached
Width	48"
Height	53"
Weight	1143 LBS
Tires	Solid Polyurethane 18" x 8.5" x 8" flat free tires; roller bearings
Tire Foot Print	3" x 5"
Approximate Downforce Applied	19.05 PSI
Approximate Weight Per Tire	250.75 LBS
Platform Size	29" x 47"
Height of Platform (from ground)	24"
Ground Clearance	5 1/2"
Warranty	Manufacturer's limited warranty covers any defect in workmanship or materials for one year from date of purchase

STANDARD JOB BOX

Dimensions	47.5"w x 30"d x 24"h
Capacity	20 cubic feet
Weight	140 LBS
Description	16 guage solid steel construction; powder coated inside and out

SECOND STANDARD JOB BOX

Dimensions	47.5"w x 30"d x 24"h
Capacity	20 cubic feet
Weight	140 LBS
Description	16 guage solid steel construction; powder coated inside and out
Weight Carry Capacity of Trailer	2000 LBS gross weight rating
Fall Arrest Capacity	Three Workers
Fall Restraint Capacity	Two Workers
Fall Protection Standards	OSHA 1926.502(d) Fall Arrest Anchor