

# Staple Chart

## Fine Wire

SJ10 A03-04\* SJ10 A/D SFT10 B SJ10 B04-05\* SJ10 B

Crown:  $\frac{3}{16}$  (4.8)  
Width: .030  
Thickness: .0215  
Gauge: 22

Crown:  $\frac{1}{2}$  (12.7)  
Width: .030  
Thickness: .0215  
Gauge: 22

SJ10 C02\* SJ10 C03-05\* SJ10 C SFT10

Crown:  $\frac{3}{8}$  (9.5)  
Width: .030  
Thickness: .0215  
Gauge: 22

SJ10 E DFP SJ10 F04-05\* SJ10 F

Crown:  $\frac{3}{16}$  (4.8)  
Width: .050  
Thickness: .019  
Gauge: 20

Crown:  $\frac{1}{2}$  (12.7)  
Width: .050  
Thickness: .019  
Gauge: 20

SJ10 G04\* SJ10 G06-10 PC0705 A54 A11

Crown:  $\frac{3}{8}$  (9.5)  
Width: .045  
Thickness: .023  
Gauge: 20

Crown:  $\frac{7}{16}$  (11.1)  
Width: .050  
Thickness: .019  
Gauge: 20

F75 LN2532- $\frac{3}{4}$ \*\*

Crown:  $\frac{7}{16}$  (11.1)  
Width: .075  
Thickness: .023  
Gauge: 18

Crown:  $\frac{3}{16}$  (4.8)  
Width: .032  
Thickness: .025  
Gauge: 21

\* Requires modification of the tool  
\*\* Available by contract

## Medium Wire

SLS20 K SL20HF SLS20 R

Crown:  $\frac{1}{4}$  (6.4)  
Width: .045  
Thickness: .030  
Gauge: 19

Crown:  $\frac{3}{16}$  (5)  
Width: .045  
Thickness: .030  
Gauge: 19

SKS L SLS20 L/SLS25 L

Crown:  $\frac{1}{4}$  (6.4)  
Width: .050  
Thickness: .044  
Gauge: 18

SKS M SLS20 M/SLS25 M

Crown:  $\frac{3}{8}$  (9.5)  
Width: .050  
Thickness: .044  
Gauge: 18

## Sencor®

SC2

X04 X06 X08


Crown: 1 (25.4)  
Gauge: 25  
Thickness: .020

Note: J, SJS model staplers drive the same staple series as the SJ10; K model staplers, the same as the SKS; L model staplers, same as the SLS20.

# Heavy Wire


SNS40\*\*  
 SNS45  
 SNS50

SKS N\* SKS N M2+

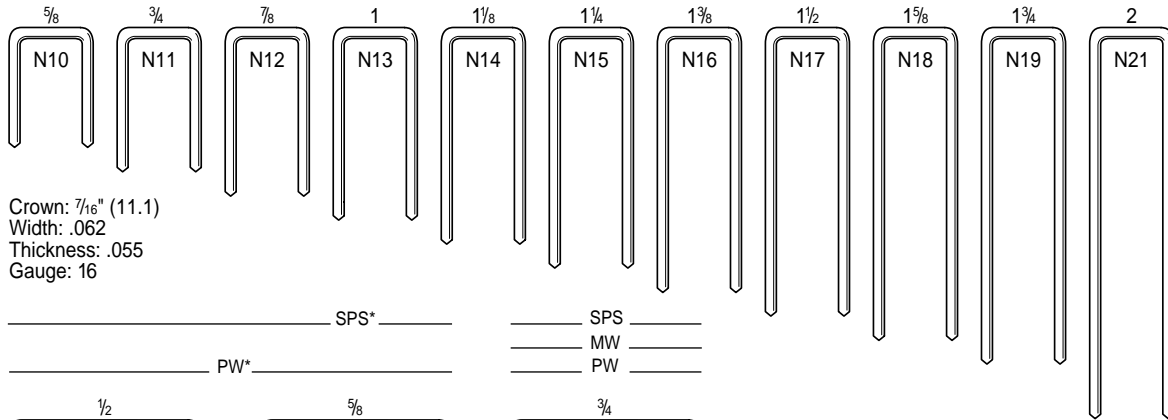


\*\*Note: 2" staples (N21) in soft wood applications only.

Crown: 7/16" (11.1)  
 Width: .062  
 Thickness: .055  
 Gauge: 16

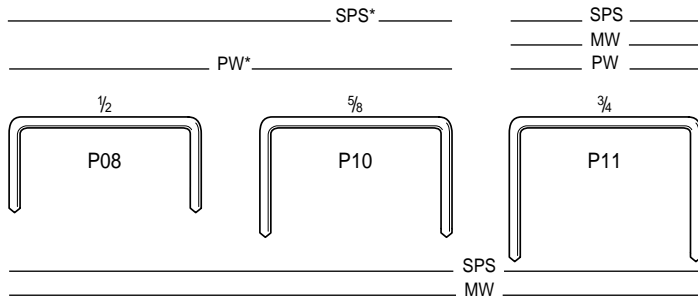


\*Tool modification recommended for high-volume usage  
 Standard PW drives 3/4" to 1 1/4". PW-2" drives 1" to 2"

SPS MW PW-2"

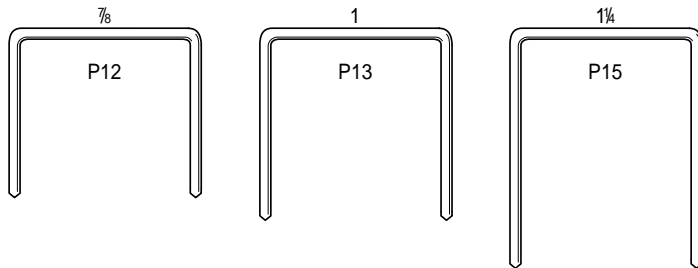


SQS55 M3+

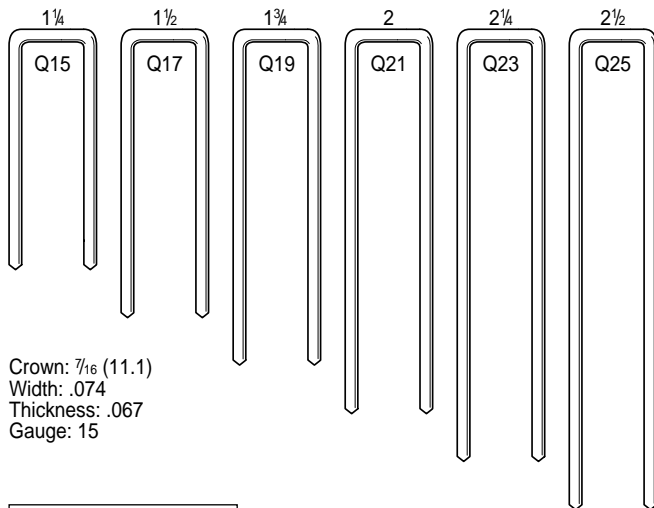


Crown: 7/16 (11.1)  
 Width: .074  
 Thickness: .067  
 Gauge: 15

## Senclamp®

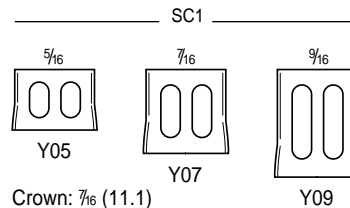

Crown: 7/16 (11.1)  
 Thickness: .020  
 Gauge: 25

Crown: 1 (25.4)  
 Width: .062  
 Thickness: .055  
 Gauge: 16



Note: Model numbers specify which tool or tools drive designated fasteners.  
 Note: Dimensions over each staple show leg length.

Note: SPS 1 1/2" Roofer drives P12 to P17  
 SPS 1 1/4" Industrial drives P11 to P15  
 SPS 1 1/2" Industrial drives P12 to P17  
 M1 Stapler drives N13 to N19