





## Alumi-Flash Extra Wide (EW) with C- 212 Cap

### SPECIFICATION

Furnish and install the Portals Plus Extra Wide Alumi-Flash as manufactured by Portals Plus, Inc., Bensenville, IL, at all points where up to two pipes .375" - 1" in diameter and up to two pipes 1" - 2" in diameter penetrate the roof. The Extra Wide Alumi-Flash shall include a .060" spun aluminum base unit with a height of 4" and a base diameter of 18". The 8" collared opening shall have two beaded sealing rings roll formed into the top edge. An EPDM (Ethylene Propylene Diene Monomer) compression molded cap model C-212 shall be utilized. All Caps shall include Portals Plus' stainless steel Snaplock Clamps. Attachment and installation of the Extra Wide Alumi-Flash shall be done in accordance with Portals Plus' instructions and the roofing membrane manufacturer's recommendations.

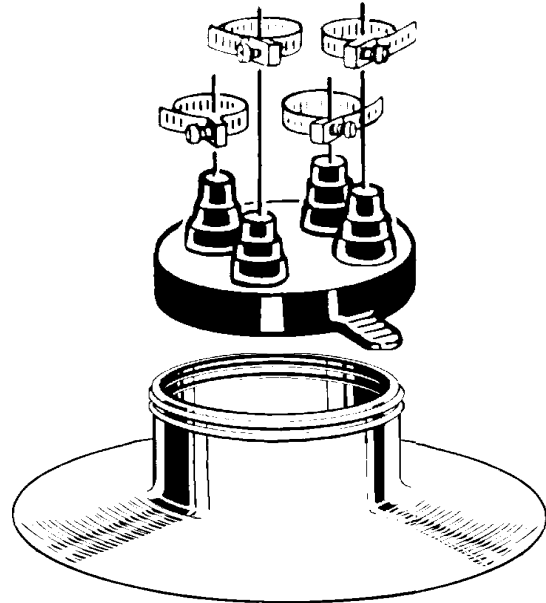

NOTE: All dimensions are I.D. of conical shaped nipples

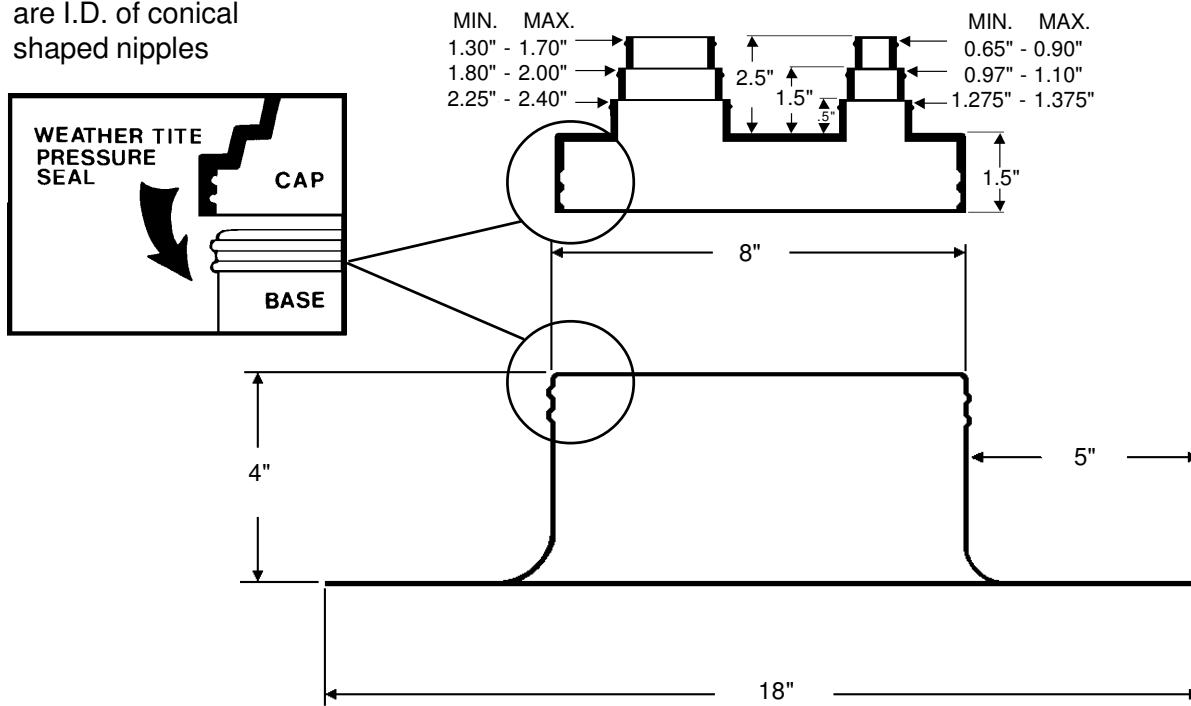

Distributed by: [BEST MATERIALS LLC](http://BESTMATERIALS.LLC)  
 Ph: 800-474-7570, 602-272-8128 Fax: 602-272-8014  
[www.BestMaterials.com](http://www.BestMaterials.com) Email: [Sales@BestMaterials.com](mailto:Sales@BestMaterials.com)