

The **OMG Cali Combo RetroDrain™** with **OverFlow**

For more information
Or to buy this product
[Click here](#)


PRODUCT DATA SPECIFICATIONS

PRODUCT DESCRIPTION

Engineered to retrofit existing combination roof and overflow drains and installed from the roof top. The OMG Cali Combo RetroDrain with OverFlow is constructed of aluminum and stainless steel for durability, and designed for use with single-ply, BUR and modified bitumen roofing systems. The system features a RAC Backflow Compression Seal that is compatible with PVC or cast iron leader pipes and is available in 3-in., 4-in. with custom sizes available.

FEATURES & BENEFITS

- Aluminum flange, .060-in. thick, 19-in. x 10.5-in.
- Two 4-in. high strainers constructed of .063-in. thick aluminum, 8-in. diameter.
- Two 6-in. diameter, .125-in thick, low profile, aluminum clamping rings.
- Overflow pipe extending up 2.5-in. from the flange.
- 9-in. long stems.
- Features RAC Backflow Compression Seal on both stems
- Simple and easy to install from the rooftop.

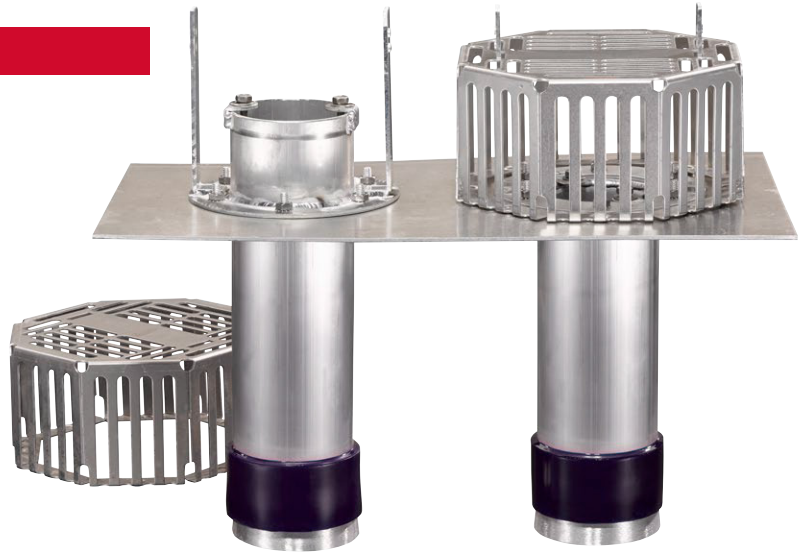

APPROVALS & STANDARDS

ANSI/SPRI RD-1 is a national performance standard for retrofit roof drains. While most retrofit drains are not tested to this standard, OlyFlow® Insert Drains – including the OMG Cali Combo RetroDrain with OverFlow with RAC Backflow Compression Seal – exceed the standard, which requires that the seal hold a 10-ft. column of water for 24 hours without leaking.

IAPMO PS 97-96 – a standard plumbing industry test designed to check for leakage at connections under a 10 foot head of water for a 24 hour period. This test was performed by the Smith-Emery Company, a nationally recognized independent test laboratory providing physical testing of construction related materials. The RAC Backflow Compression Seal produced no leakage.

PHYSICAL DATA

DRAIN BODY		SEAL	
.080-in. thick aluminum		RAC Backflow Compression Seal requires 7/16-in. wrench	
FLANGE		STRAINER DOME	
19-in. x 10.5-in.		Two 4-in. high strainers constructed of .063-in. thick aluminum, 8-in. diameter.	
STEM		Clamp Ring	
9-in. length		Two 6-in. diameter, .125-in. thick, low profile.	

ORDERING INFORMATION

CAT. NO.	SIZE	DOMES TYPE	PKG	WEIGHT
RACCAL3	3-in.	Aluminum	Each	27 lbs.
RACCAL4	4-in.	Aluminum	Each	27 lbs.



Superior productivity.
Superior performance.