


Distributed by: BEST MATERIALS ®
Ph: 800-474-7570, 602-272-8128 Fax: 602-272-8014
www.BestMaterials.com Email: Sales@BestMaterials.com

Need to **flash** it?

DEKS brings you the world's best flashing range

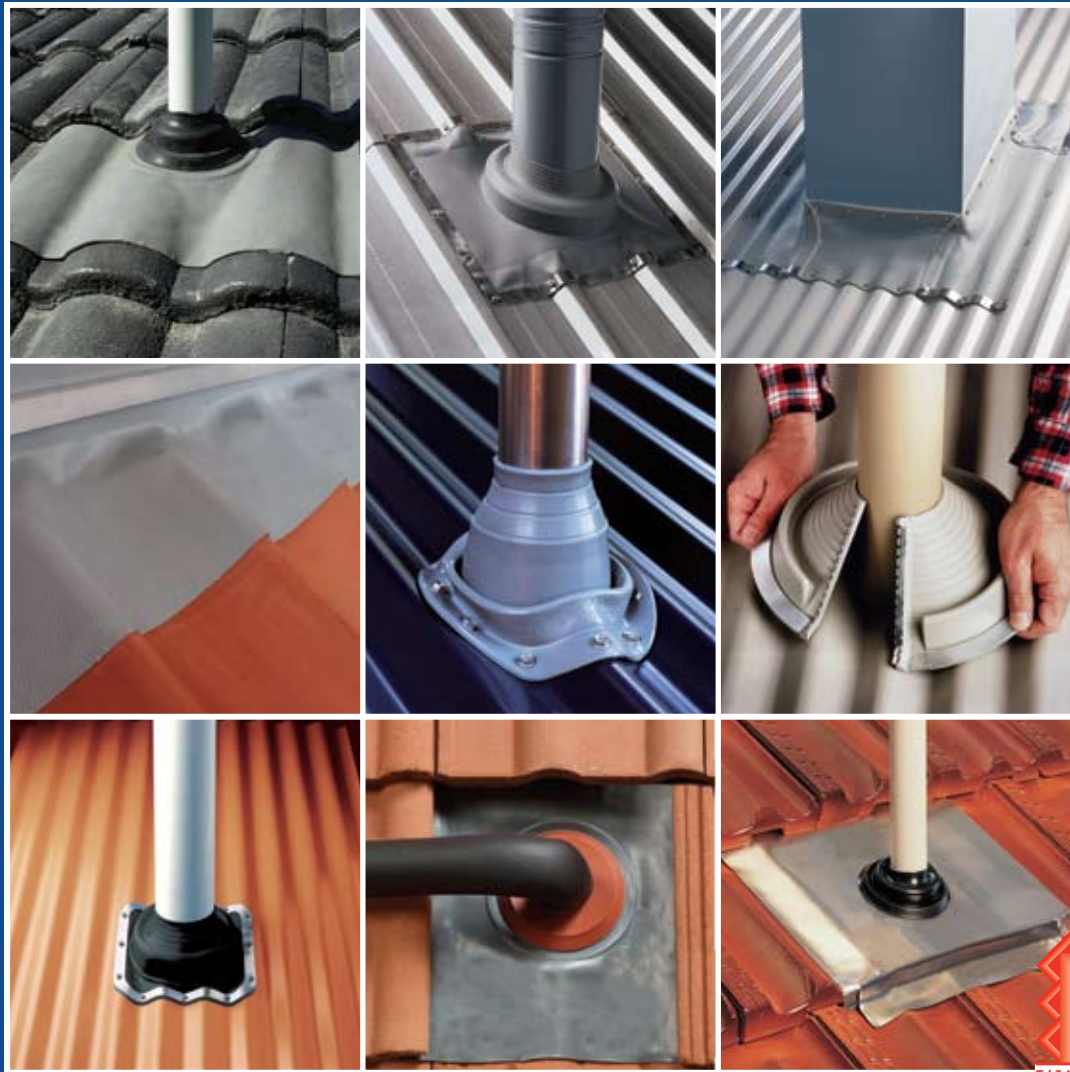

DEKS
A Skellerup Industries Company

- Metal Chimneys • Hot & Cold Flues • Vents
- Refrigeration/air con connections • Antennas
- Conduits • Ducts • Wiring/cables

Metal Roofs

Dektite® Premium



Perfect for flashing pipes on metal roofs

A multi – application flashing with a highly durable EPDM cone and base, edged with a flexible aluminium band, flashes hot or cold flues and pipes on metal roofs. The square base fits any prepared hole on most roof profiles.

Code No	Pipe External	Pitch	Carton QTY
DFE 0-35	0-35mm	0-1 $\frac{3}{8}$ "	20
DFE 5-55	5-55mm	$\frac{1}{4}$ - 2 $\frac{1}{8}$ "	20
DFE 50-70	50-70mm	2 - 2 $\frac{3}{4}$ "	20
DFE 5-120	5-120mm	$\frac{1}{4}$ - 4 $\frac{3}{4}$ "	10
DFE 110-170	110-170mm	4 $\frac{1}{2}$ - 6 $\frac{3}{4}$ "	5
DFE 160-220	160-220mm	6 $\frac{1}{4}$ - 8 $\frac{3}{4}$ "	5
DFE 160-300	160-300mm	6 $\frac{1}{4}$ - 11 $\frac{3}{4}$ "	5
DFE 290-440	290-440mm	11 $\frac{1}{2}$ - 17 $\frac{3}{8}$ "	2

Available in Black, Grey, Red and Silicone.

Dektite® Original



The original watertight flashing for metal roofs

The original watertight flashing designed to seal both hot and cold flues and pipes on metal roofs. A strong water tight seal and a strong flexible base.

Code No	Pipe External	Pitch	Carton QTY
DF100G	0-35mm	0-1 $\frac{3}{8}$ "	20
DF101G	5-65mm	$\frac{1}{4}$ - 2 $\frac{1}{2}$ "	10
DF102G	45-80mm	1 $\frac{3}{4}$ - 3 $\frac{1}{4}$ "	10
DF103G	5-127mm	$\frac{1}{4}$ - 5"	10
DF104G	73-160mm	3 - 6 $\frac{1}{4}$ "	10
DF105G	108-190mm	4 $\frac{1}{4}$ - 7 $\frac{1}{2}$ "	5
DF106G	125-230mm	5-9"	5
DF107G	150-280mm	6-11"	5
DF108G	175-330mm	7-13"	5
DF109G	254-783mm	10-19"	2

Available in Grey EPDM. Also available in Red Silicone for higher heat needs.

Dektite® Ezi – Seal™



Forget Silicone just screw it down

Features a revolutionary non-absorbent and non porous sponge gasket that seals by compression, even in wet conditions, it hugs the roof line to provide a watertight seal without the need for silicone adhesive.

Code No	Pipe External	Pitch	Carton QTY
DFE 0-35EZ	0-35mm	0- $\frac{3}{8}$ "	1
DFE 5-55EZ	5-55mm	$\frac{1}{4}$ - 2 $\frac{1}{8}$ "	1
DFE 50-70EZ	50-70mm	2 - 2 $\frac{3}{4}$ "	1
DFE 5-120EZ	5-120mm	$\frac{1}{4}$ - 4 $\frac{3}{4}$ "	1
DFE 110-170EZ	110-170mm	4 $\frac{1}{2}$ - 6 $\frac{3}{4}$ "	1
DFE 160-220EZ	160-220mm	6 $\frac{1}{4}$ - 8 $\frac{3}{4}$ "	1
DFE 160-300EZ	160-300mm	6 $\frac{1}{4}$ - 11 $\frac{3}{4}$ "	1
DFE 290-440EZ	290-440mm	11 $\frac{1}{2}$ - 17 $\frac{3}{8}$ "	1

Available in Black EPDM.

Dektite® Soaker™



For Hi/Low Roof Pitches

The large base of a Dektite Soaker dramatically reduces rainwater back up on very low or very high roof pitches and deep ribbed roofing profiles.

Code No	Pipe External	Pitch	Carton QTY
DF602	75-155mm	3-6"	3
DF603	114-254mm	4 $\frac{1}{2}$ - 10"	3
DF605	254-406mm	10-16"	2
DF606	380-610mm	15-24"	1

Available in Grey EPDM.

Retrofit Original



For Repairs & Difficult To Access Pipes

Most commonly used when flashing around an existing penetration and going over the top of pipe material is not an option. The unique patented zip lock does not require separate clips – just clamp it together.

Code No	Pipe External	Pitch	Carton QTY
RF801	20-70mm	$\frac{3}{4}$ - 2 $\frac{3}{4}$ "	10
RF802	50-185mm	2 - 7 $\frac{1}{4}$ "	5
RF803	85-255mm	3 $\frac{1}{4}$ - 10"	5
RFS4	235-425mm	9 $\frac{1}{4}$ - 16 $\frac{3}{4}$ "	2

Available in Black, Grey and Red EPDM.

Distributed by: **BEST MATERIALS®**

Ph: 800-474-7570, 602-272-8128 Fax: 602-272-8014

www.BestMaterials.com Email: Sales@BestMaterials.com

Tile Roofs

Aluminium



The SELDEK® Aluminium™ won't stain or corrode spouting and gutters. The EPDM cone, which is trimmed on site to fit, is ingeniously locked to a high grade and malleable 99.9% pure aluminium base.

Code No	Pipe External	Pitch	Carton QTY	
SDAMini	0-35	0 - 3/8"	0-45° or 12/12	3
SDA100	12-70mm	1/2 - 2 3/4"	0-45° or 12/12	3
SDA101	50-170mm	2 - 6 3/4"	0-45° or 12/12	3
SDA102	110-200mm	4 1/2 - 8"	0-45° or 12/12	3
SDA103	160-300mm	6 1/2 - 11 3/4"	0-45° or 12/12	5
SDA104	300-450mm	12 - 17"	0-45° or 12/12	5

Available in Black EPDM.

Dekform



Lead Flashings No Longer Required

Designed as an environmentally friendly product eliminating concerns caused by using lead. Designed to suit all tiled roof flashing applications. A great product choice when Rain Water Harvesting is in use. Keep your water clean from contamination.

Code No	Pipe External	Sheet Size	Carton QTY	
DFM100GB	0-35mm	0 - 1 3/8"	410mm x 490mm 16 x 19'	4
DFM101GB	12-070mm	1/2 - 2 3/4"	410mm x 490mm 16 x 19'	4
DFM102GB	50-70mm	2 - 2 3/4"	600mm x 450mm 24 x 18'	4
DFM103GB	50-170mm	2 - 6 3/4"	600mm x 450mm 24 x 18'	4
DFM108GB	175-330mm	7 - 13"	850mm x 550mm 34 X 22'	1
DFM200GR	0-35mm	0 - 1 3/8"	410mm x 490mm 16 x 19'	4

Nu Lead



No more worries about unprotected lead

Combines a long - life weather resistant EPDM cone with grey primed Acrylead protected apron. The unique thermo baked coating does not affect the lead's malleability, and prevents leaching onto the roof and into gutter, down pipes and the water table.

Code No	Pipe External	Sheet Size	Pitch	Carton QTY
DNL101	12-70mm	1/2 - 2 3/4"	490 x 410mm 16 x 19' 0-40° or 10/12	4
DNL103	50-170mm	2 - 6 3/4"	600 x 450mm 24 x 18' 0-40° or 10/12	4
DNL108	175-330mm	7 - 13"	850 x 550mm 34 x 22' 0-40° or 10/12	1

Available in Red & Black EPDM with grey lead base.

Solar Dek



The speciality flashing for solar panels

Designed specifically for solar panel installation on both metal and tile roofs. Fast. Efficient. Safe.

Code No	Pipe External	Base Size	Pitch	Carton QTY
DNL100	0-35mm	490 x 410mm	19 x 16' 0-45° or 12/12	4
DNL200	0-35mm	490 x 410mm	19 x 16' 0-45° or 12/12	4
DFE 0-35	0-35mm	99 x 99mm	4 x 4' 0-60° or 18/12	20

Available in Black EPDM, DNL200 is Red Silicone for higher heat needs.

Speciality

Perform



Lead Free Flashing

The future is lead free. Perform is environmentally friendly as it is made of aluminium sheeting coated with polymer rubber. It is 1/3 of the weight of lead which allows for fast and easy mounting.

Code No	Length	Width	Weight	Carton QTY
PFR 4-250	4mtr or 13'	250mm or 10'	3.5kg or 7.7lbs	6
PFR 4-300	4mtr or 13'	300mm or 12'	4.32kg or 9.5lbs	6
PFR 4-400	4mtr or 13'	400mm or 15'	5.76kg or 12.67lbs	6
PFR 4-450	4mtr or 13'	450mm or 18'	6.48kg or 14.26lbs	6
PFR 4-600	4mtr or 13'	600mm or 24'	8.64kg or 19.16lbs	6

Available in Black, Grey and Red. Also available in a range of sheets.

Dekstrip®



Stretches to Any Shape, Seals & Stays

Forms and stretches to solve all your flashing problems. Dekstrip expandable edge flashing is the answer to flashing large, curved award profiles and penetrations. It ideal for box gutter expansion joints and is the fast, easy & most effective way to flash a bullnose.

Code No	Length	Width	Carton QTY
DS23-180	23m or 75'	180mm or 7"	1
DS23-235	23m or 75'	235mm or 9"	1
DS23-305	23m or 75'	305mm or 12"	1
DS10-180	10m or 33'	180mm or 7"	1
DS10-235	10m or 33'	235mm or 9"	1
DS10-305	10m or 33'	305mm or 12"	1
DS3-235	3m or 10'	235mm or 9"	1

Available in Grey EPD

GREAT REASONS For choosing DEKS Washers

- **A 20 year warranty**
your guarantee of a perfectly designed product made from a unique, world best compound.
- **A range unmatched by any other manufacturer**
Engineered, TrueBlue and Multi-Seal options for every fastener application.
- **Trouble free seals**
50years as washer specialist gives DEKS washers the design advantage and brings quality assurance to your installation.
- **Easy to assemble**
High levels of quality control ensure automated and hand assemblies are free of downtime.
- **Always traceable**
Every washer is clearly marked for easy identification.
- **Customised Service**
Our leading edge technical team can provide a solution to any washer requirement.

Dekseal® True Blue® Fluted and smooth




Offering both consistency and longevity, Dekseal True Blue washers come in two styles to suit your assembly process and application needs.

- ✓ Non-Conductive – low carbon prevents corrosion problems
- ✓ Superior quality EPDM – made to last
- ✓ Fast to assemble – quick to fit, stay in place during transportation
- ✓ UV and Ozone resistant – maximum life span in harsh environments

Description	To Suit Fastener	Bore Dia (0.2mm)	Outer Dia (0.5mm)	Thickness (0.4mm)	Colour	Box QTY	Part Number
SMOOTH							
8# Smooth	8#	3.9	7.4	2.0	Black	100,000	DT-S00-B08-A
8# Smooth B	8#	2.6	9.3	2.0	Black	100,000	DT-S00-B08-B
10# Smooth A	10#	4.2	8.5	2.0	Black	100,000	DT-S00-B10-A
10# Smooth B	10#	4.5	8.7	3.0	Black	75,000	DT-S00-B10-B
10# Smooth C	10#	4.5	8.7	2.0	Black	100,000	DT-S00-B10-C
12# Smooth	12#	4.9	10.6	3.0	Black	50,000	DT-S00-B12-A
14# Smooth A	14#	5.6	10.6	3.0	Black	50,000	DT-S00-B14-A
14# Smooth B	14#	5.8	10.6	3.0	Black	50,000	DT-S00-B14-B

Description	To Suit Fastener	Bore Dia (0.2mm)	Flute Dia (0.2mm)	Outer Dia (0.5mm)	Thickness (0.4mm)	Colour	Box QTY	Part Number
FLUTE								
10# 5 Flute	10#	4.5	3.5	8.8	2.6	Black	50,000	DT-F05-B10-A
12#5-Flute	12#	5.6	4.6	10.6	5.6	Black	50,000	DT-F05-B12-A
14# 6 Flute	14#	6.5	5.3	10.8	3.0	Black	50,000	DT-F06-B14-A

Dekseal® Engineered™ Fully moulded



Dekseal Engineered are a customised range designed to suit specific materials including metal, fibre glass and plastic – each washer has been designed to ensure weather – tightness on specific roofing systems.

- ✓ Engineers for precision – for a consistent fit and performance
- ✓ Weather tight fir every time- designed to stay strong
- ✓ Four styles- to suit a range of applications

Description	To Suit Fastener	Diameter x Thickness (mm)	Colour	Box QTY	Part Number
POLYCARB AND FIBREGLASS Dekseal®					
<i>For use on Polycarbonate and fibreglass roofing</i>					
22mm Polycarb	10/12#	22 x 8	Grey	10,000	DE-P22-G12-A
26mm Polycarb	12#	26 x 9	Grey	5,000	DE-P26-G12-A
32mm Polycarb	12#	32 x 9	Grey	3,000 or 5,000	DE-P32-G12-A
SPANDEK® / KLIPOK® Dekseal®					
<i>With a pressed metal washer on Spandek®, Trimdek® and Klipok® type roofing</i>					
Spandek	14#	35 x 5	Black	5,000	DE-S35-B14
Klipok	14#	29 x 6	Black	10,000	DE-K29-B14
CUSTOM ORB® Dekseal®					
<i>With a pressed metal washer on custom orb type roofing</i>					
Custom Orb	14#	18 x 19	Black	10,000	DE-C18-B14-A

Dekfast® Multi Seal™ Metal backed



A unique washer design that forms a seal against the washer face of the fastener as well as the roof sheet. The design is self-aligning ensuring that even if the fastener is driven at an angle, the washer seals effectively in all four locations.

- ✓ Extra Strength – metal encapsulated in EPDM for real strength
- ✓ Four Sealing Points – unique design gives a perfect seal
- ✓ Wide Size range – from 12mm – 32mm
- ✓ No distortion – engineered to distribute the load

Description	Fastener	Diameter (mm)	Colour	Box QTY	Part Number
ALUMINIUM					
A12 – 10/12	10/12	12	Black	25,000	DM-A12-B12-A
A16 – 10/12	10/12	16	Black	15,000	DM-A16-B12-A
A16 – 12/14	12/14	16	Black	15,000	DM-A16-B14-A
A16 – 16	16	16	Black	15,000	DM-A16-B16-A
A19 – 12/14	12/14	19	Black	10,000	DM-A19-B14-A
A25 – 12/14	12/14	25	Black	5,000	DM-A25-B14-A
A32 – 12/14	12/14	32	Black	3,000	DM-A32-B14-A
GALVANISED					
G12 -10/12	10/12	12	Black	25,000	DM-G12-B12-A
G16 – 10/12	10/12	16	Black	15,000	DM-G16-B12-A
G16 – 12/14	12/14	16	Black	15,000	DM-G16-B14-A
G19 – 12/14	12/14	19	Black	10,000	DM-G19-B14-A
G25 – 12/14	12/14	25	Black	5,000	DM-G25-B14-A
G32 – 12/14	12/14	32	Black	3,000	DM-G32-B14-A
STAINLESS STEEL					
S12 – 10/12	10/12	12	Black	25,000	DM-S12-B12-A
S16 – 10/12	10/12	16	Black	15,000	DM-S16-B12-A
S16 – 12/14	12/14	16	Black	15,000	DM-S16-B14-A
S19 – 12/14	12/14	19	Black	10,000	DM-S19-B14-A
S25 – 12/14	12/14	25	Black	5,000	DM-S25-B14-A