

Membrane Plates

2-3/8" round, 2" round  
For membrane using #14, #15, K-fast,™ Dekspike,™ and T.P.R.

- Engineered barb design creates maximum wind uplift rating.
- SFS intec plates are stacked for ease of fastening pattern.




Distributed by: BEST MATERIALS LLC  
Ph: 800-474-7570, 602-272-8128 Fax: 602-272-8014  
www.BestMaterials.com Email: Sales@BestMaterials.com

Application

**Galvalume Steel Round 2" 20-Ga Barbed Plate**


- Use with:
- #14 Dekfast
  - #15 Dekfast HS
  - 1/4" Dekfast Spike
  - TPR

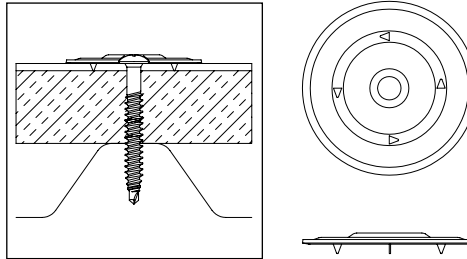

OD: 2"  
ID: .265/.270"  
Thickness: .038"  
Finish: AZ50 Galvalume

**Non-Barbed Galvalume 2" Round Membrane Plate**


- Use with:
- #12 Dekfast
  - #14 Dekfast

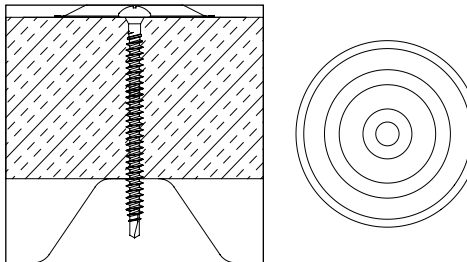

OD: 2" Round  
ID: .255"  
Thickness: .032"  
Finish: AZ55 Galvalume

**Galvalume Steel Round 2-3/8" 20-Ga Barbed Plate**

- Use with:
- #14 Dekfast
  - #15 Dekfast HS
  - 1/4" Dekfast Spike
  - TPR
  - K-Fast

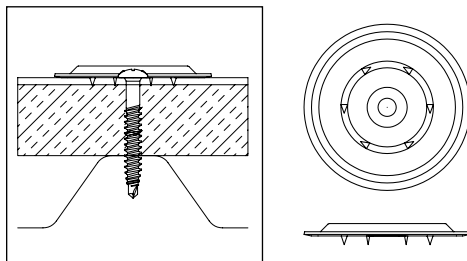

OD: 2-3/8"  
ID: .260/.262"  
Thickness: .038"  
Finish: AZ50 Galvalume

Notes

Dimensions are nominal inches unless noted.

Selection

Item	Part No.	Carton Wt. (lbs)	Carton Qty.	Skid Qty.
Galvalume Steel Round 2", 20-Ga Barbed Plate	M7525	29	1000/pail	40,000
Non-Barbed Galvalume 2" Round Membrane Plate	M7540	34	1000/pail	50,000
Galvalume Steel Round 2-3/8", 20-Ga Barbed Plate	M7665	36	1000/pail	24,000

Approvals

Dekfast fasteners and seam plates are FM approved. Refer to current FM Approval Guide and Supplements for system manufacturers approvals.

Installation

Use in applications approved by the roofing system manufacturer.

Options

