



# 626-35



## POLYKEN® Foilastic™ 626-35 Premium Flashing Tape


### APPLICATIONS

- Used to flash hip, ridge, and penetration details on concrete tile roofs.
- Gutters, roof valleys and eaves, chimneys and vents, rooftop duct systems.
- Sheet metal repairs on mobile homes, outdoor buildings, and trailers.
- Flash around window, door, skylight and dormer openings.
- Any above-grade critical areas that need protection against water and air leaks.

### FEATURES & BENEFITS

- Provides an excellent bond to wood, metal, vinyl and other common building materials.
- Compatible with most caulking and sealants - does not react with most solvent-based solutions.
- Provides long-term weather-tight seal to prevent air, moisture, and water vapor penetration.
- Easy to remove blue LDPE release liner that will not tear.
- Paintable aluminum backing.
- Flexible at low temperatures & stays pliable to maintain a tight seal.
- No cracking over 1/4" at mandrel at 0°F.
- Protective aluminum backing allows for indefinite UV exposure.
- This product is covered by 12-year limited warranty. Please see warranty for details.
- **Contributes toward satisfying EA Credit 1 (Optimize Energy Performance) and EQ Credit 4.1 (Low Emitting Materials, Adhesives & Sealants) under LEED®.**

### CONSTRUCTION

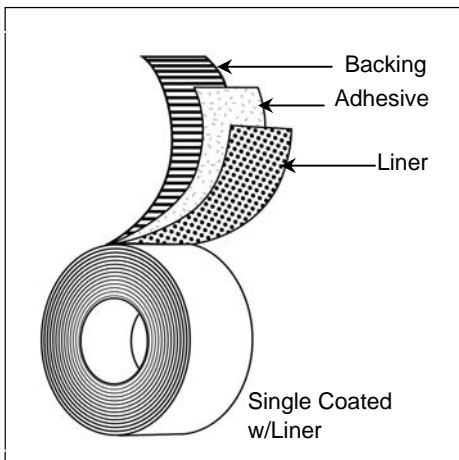

### PRODUCT DESCRIPTION

#### Single-Coated w/Liner Construction

#### Backing:

- 2 mil Aluminum Foil

#### Adhesive:

- Butyl Rubber

#### Liner:

- Blue LDPE

#### Colors:

- Aluminum

### TEST DATA

| Test                          | Typical Value  | Typical Value (Metric) | Test Method  |
|-------------------------------|----------------|------------------------|--------------|
| Total Thickness               | 35 mils        | 889.00 μ               | ASTM D 1000  |
| Backing Thickness             | 2 mils         | 50.80 μ                | ASTM D 1000  |
| Mastic Thickness              | 33 mils        | 838.20 μ               | ASTM D 1000  |
| <b>Adhesion Values</b>        |                |                        |              |
| Steel                         | 18.3 lb./in.   | 3.20 N/mm              | PSTC-1       |
| Plywood                       | >12.3 lb./in.  | 2.1 N/mm               | ASTM D903-93 |
| OSB                           | >8.7 lb./in.   | 1.5 N/mm               |              |
| Felt                          | >11 lb./in.    | 1.9 N/mm               |              |
| Unprimed Brick                | >7.3 lb./in.   | 1.3 N/mm               |              |
| Housewrap                     | >15.2 lb./in.  | 2.7 N/mm               |              |
| Extruded Vinyl                | >14.9 lb./in.  | 2.6 N/mm               |              |
| Tensile Strength (Machine)    | 445 psi        | 3066 kN/m2             | ASTM D412-97 |
| Tensile Strength (Cross)      | 300 psi        | 2411 kN/m2             | ASTM D412-97 |
| Application Temperature Range | 30°F to 180°F  | -1°C to 82°C           |              |
| Operating Temperature Range   | -30°F to 200°F | -34°C to 93°C          |              |
| VOC Content                   | <1 g/L         |                        |              |

#### Recommended storage conditions: 40-60% Humidity, 60°F-80°F

\*\*Products are not reviewed or certified under the LEED® Rating System. LEED® credit requirements cover the performance of materials in aggregate, not performance of individual products or brands. For more information on LEED®, visit [www.usgbc.org/leed](http://www.usgbc.org/leed).

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To the best of our knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, in each case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.

Distributed by: **BEST MATERIALS LLC, Phoenix AZ**  
**602-272-8128 800-474-7570 [www.bestmaterials.com](http://www.bestmaterials.com)**  
**email: [sales@bestmaterials.com](mailto:sales@bestmaterials.com)**