


THERMOSET / THERMOPLASTIC MEMBRANE AFX

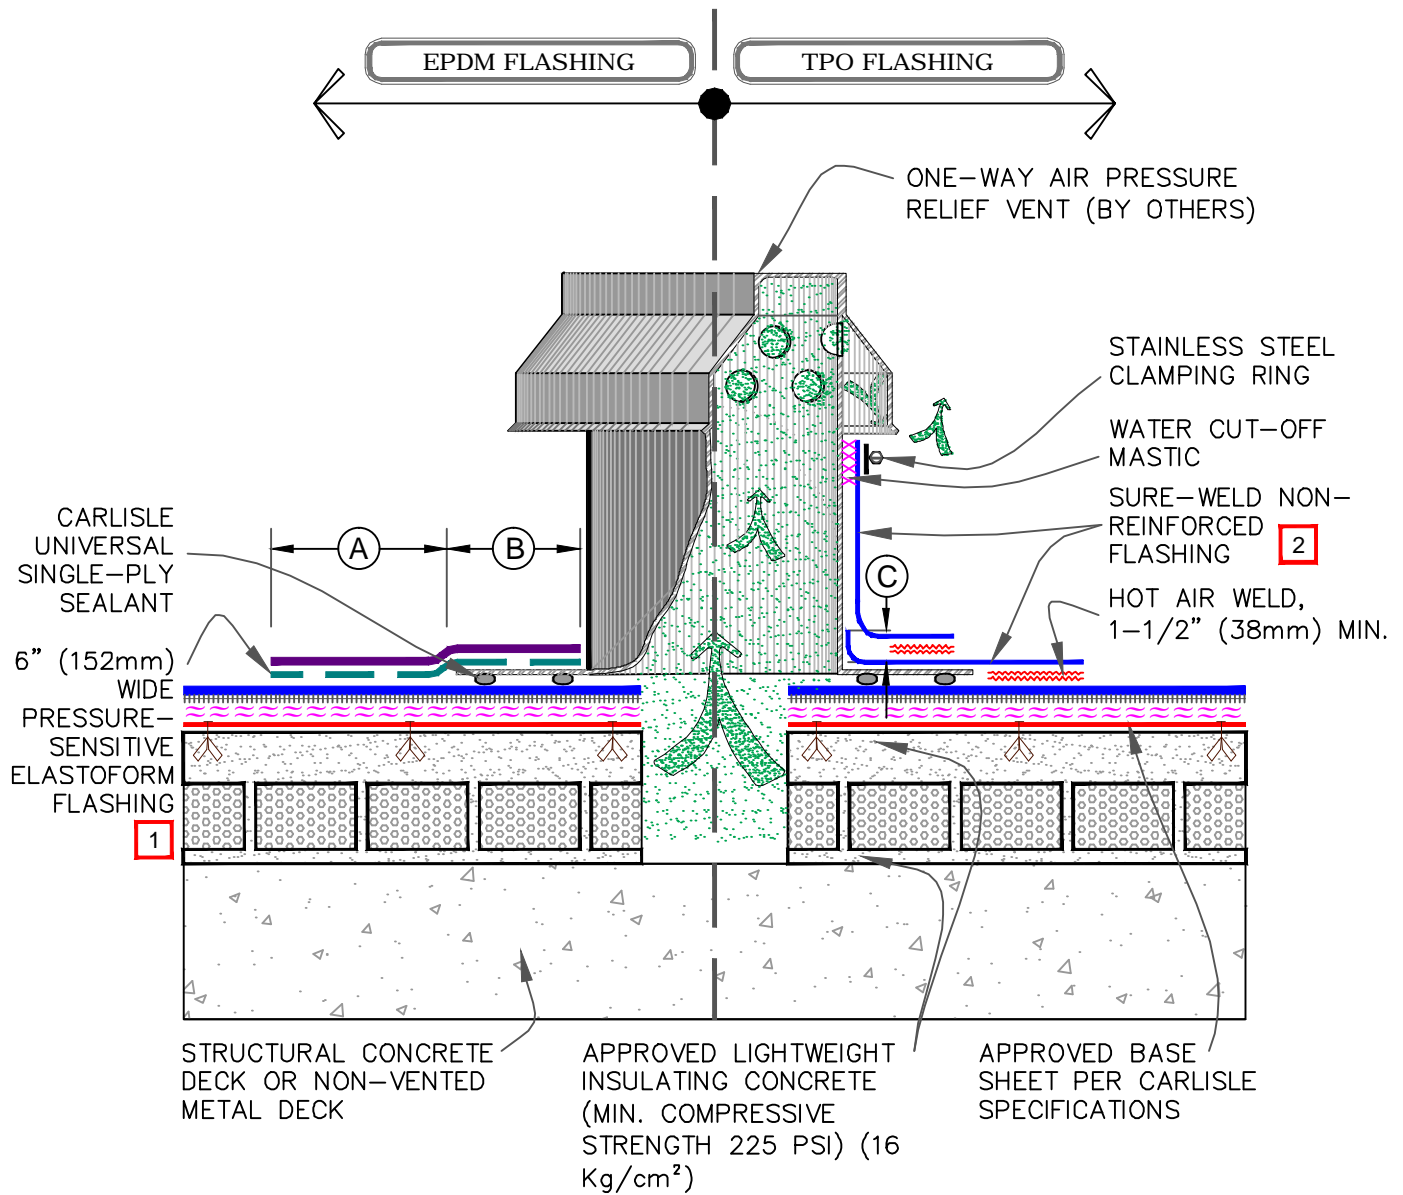

DIMENSIONS	mm	
(A)	3"	76 MIN.
(B)	2"	51 MIN.
(C)	1/2"	13 MIN.

NOTE:

1. APPLY EPDM PRIMER TO THE METAL FLANGE AND MEMBRANE SURFACE PRIOR TO INSTALLING PRESSURE-SENSITIVE ELASTOFORM FLASHING.
2. AS AN OPTION TO THERMOPLASTIC NON-REINFORCED MEMBRANE FLASHING, PRE-FABRICATED SPLIT PIPE SEAL MAY BE USED.

FREQUENCY OF VENTS		
TYPE OF SUBSTRATE	NO. OF VENTS	MAX. AREA PER VENT
VERMICULITE LIGHTWEIGHT INSULATING CONCRETE	1	1,000 S.F. (91M ²)
CELLULAR OR PERLITE LIGHTWEIGHT INSULATING CONCRETE	1	2,000 S.F. (186M ²)

<p>AFX MEMBRANE</p> <p>ASPHALT/COLD APPLIED</p> <p>0 SEE NOTE(S)</p>	<p>ONE-WAY PRESSURE RELIEF VENT WITH AFX MEMBRANE</p> <p>For additional information, refer to Specifications</p>	<p>DETAIL NO.</p> <p>1</p> <p>AFX ADHERED</p>
---	---	--