

SUBMITTAL: SAF-T-HATCH™ SAFETY RAIL FOR ROOF OPENINGS

This Patented railing system features a clamping frame that is assembled around the curb base of roof hatch or skylight. This railing does not penetrate the curb or the roof deck - it is designed to protect your roof warranty. Meet OSHA required compliance for safe egress and ingress through all of your rooftop hatch openings while hatch is in use. Complies with OSHA [CFR 29 -1910.23](#) and [CFR 29 - 1910.27](#).

SPECIFICATIONS:

Pipe Rail: 1 5/8" OD A53 Grade B seamed galvanized steel pipe.

Tubing Base: Factory galvanized 2" x 2" 16 gauge seamed steel.

Tubing Base Pad: Styrofoam 3/4" thick isolated pad.

Finish: Zinc coated Galvanized pipe (ASTM. A653). Safety yellow powder coat paint finish

Hardware: Zinc plated threaded rods, caps, nuts, bolts and washers.

Chain: Zinc plated 3/16" ASTM proof coil with hoop and rings as required

Railing Clamps: JL Industries models AIS 2-7, 6-7, 18-7, 20-7 and 28-7 or as required

Pipe Caps: Zinc plated post caps with 1 1/4" UV resistant vinyl side rail caps.

Installation: Quickly installs by a clamping frame around curb base of roof hatch or fire hatch. Does not penetrate the roof deck or require "approved" installer. Fits all brands of existing roof hatches with cap flashing - field adjustable to fit flashing size.

OPTIONAL FEATURES AT ADDITIONAL COST:

___ **SHG-2436 Steel Gate Option:** fits Models SHWC 1-5 (up to 48" opening) Opening on width side, or special request - call customer service.



___ **-GRAB:** Optional Welded Grab Bar for Models Narrower than 36"

Integrated RHG Steel Roof Hatch with Permanent Rail Supports - [See Model RHG-STH.](#) OPTIONAL RIGID GATE—SEE SEPARATE SUBMITTAL FOR DETAILS


SHWC-3036 In Stock at One or More of Our Warehouses!



SAF-T-HATCH RAILING WITH STANDARD ZINC-PLATED CHAIN

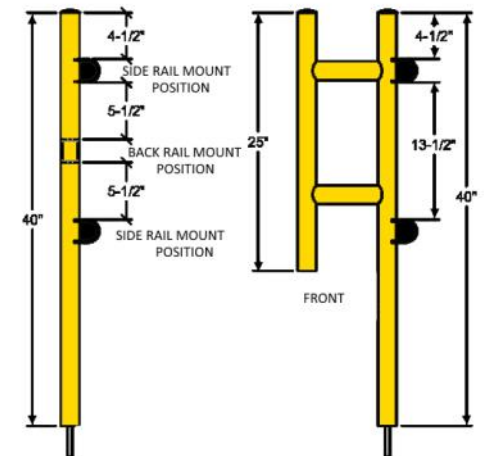

Grab Bar Shown Above Included with 36" and Greater Models. Optional on Narrow Models. Select the "-GRAB" Option.

 <p>ACTIVAR INC. CONSTRUCTION PRODUCTS GROUP</p> <p>SAF-T-HATCH™ IS A TRADEMARK OF ACTIVAR DOWNLOAD THE MOST CURRENT SUBMITTAL BEFORE ORDERING</p>	Distributor:	Quantity:
	Contractor:	Approved By:
	Model #:	Architect::
	Project:	Date:
© Activar Construction Products Group, Inc 2016		

SUBMITTAL: SAF-T-HATCH™ SAFETY RAIL FOR ROOF OPENINGS

Qty	Model Please note new part #	Previous Model	Curb Opening Length (Egress Side)	Curb Opening Width (Hinge Side)	Approx Weight	Fits ACPG Roof Hatch Model
	SHWC-3036	STH-1	30"	36"	66 lbs	RHA/RHG/RHR-1
	SHWC-3054	STH-2	30"	54"	70 lbs	RHA/RHG-2
	SHWC-3096	STH-3	30"	30"	80 lbs	RHA/RHG-3
	SHWC-3636*	STH-4	36"	36"	68 lbs	RHA/RHG-4
	SHWC-4848*	STH-5	48"	48"	75 lbs	RHA/RHG-5

SHWC-3036 In Stock at One or More of Our Warehouses!



NEW STANDARD SIZES NOW AVAILABLE BELOW!

Qty	Model	Curb Opening Length (Egress Side)	Curb Opening Width (Hinge Side)	Approx Weight	Fits Roof Hatch with Outside Curb Dimensions Length x Width
	SHWC-2424	24"	24"		26" x 26"
	SHWC-2430	24"	30"		26" x 32"
	SHWC-2436	24"	36"		26" x 38"
	SHWC-2496	24"	96"		26" x 98"
	SHWC-3030	30"	30"		32" x 32"
	SHWC-3648*	36"	48"		38" x 50"
	SHWC-3696*	36"	96"		38" x 98"

Grab Bar Included with Models 36" or Wider. SHWC-3636, SHWC-4848, SHWC-3648, SHWC-3696

Available as an Option for Narrower Models
Add "-GRAB" to Part # - SHWC-3036-GRAB

ABOVE MODELS FIT HATCHES WITH 1" CURB THICKNESS. CONTACT US IF GREATER THAN 1".

* Models include grab bar

CUSTOM SIZES AVAILABLE UPON REQUEST:

Outside Curb Dimension Egress Side: _____

Outside Curb Dimension Hinge Side: _____

