


# SUBMITTAL: RHR GALVANIZED ROOF RETROFIT HATCHES

The Model RHG Series roof hatches provide for normal ladder, step ladder and stair access to roof from interior of the building. Manufactured from galvanized steel with weather resistant gasketing, these units feature long life, low maintenance and ease of operation. J.L. offers fully welded, mitered corners and box type door design. Units install easily over roof opening and are secured from base flange to roof deck

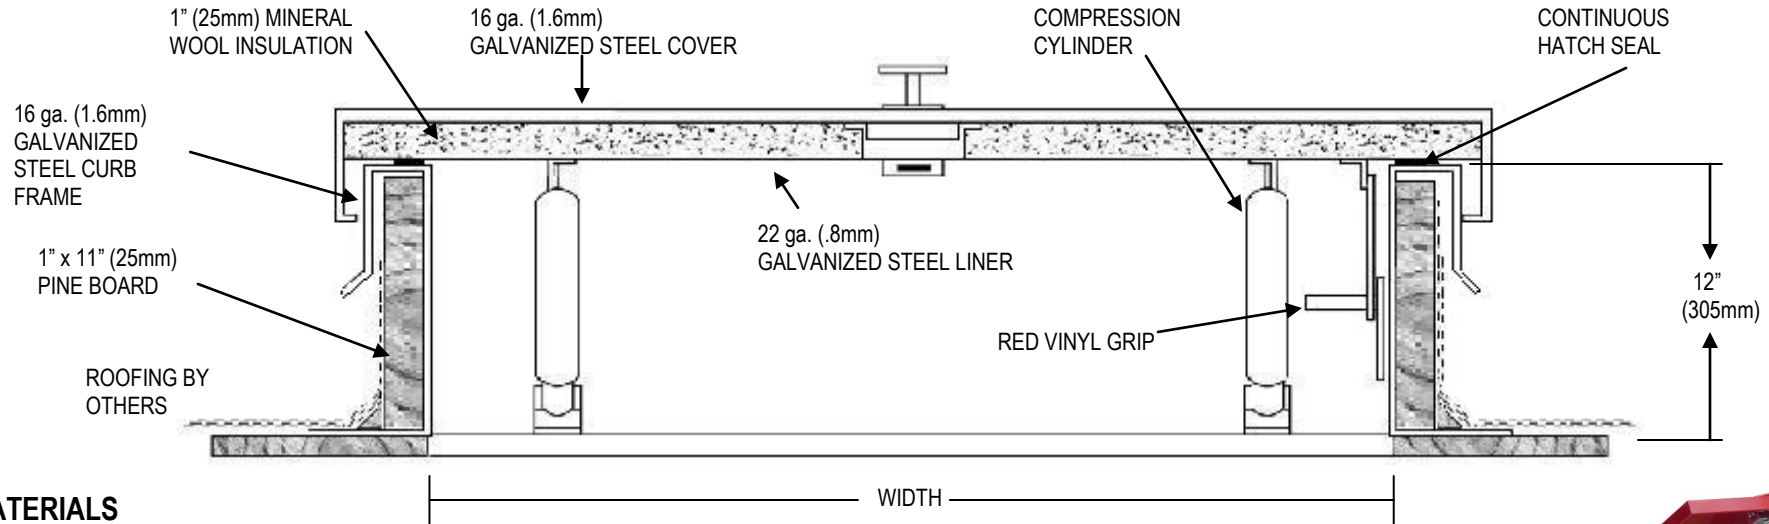

## MATERIALS

**Curb:** 16 ga. galvanized steel. 12" high curb with 3-5/8" wide flange including holes for securing to roof deck. (Curb includes integral counter flashing)

**Cover:** 16 ga. galvanized steel., with 22 ga. galvanized steel liner. Hinged on "width" side.

**Finish:** Red hammertone powder coat.

**Door Seal:** EPDM continuous hatch seal.

**Insulation:** 1"x 11" pine board surrounding base. 1" mineral wool insulation between exterior door and liner.

**Hardware:** Heavy duty zinc-coated hinge and pin. Fastening hardware is zinc-coated.

**Linkage:** Heavy gauge automatic hold open arm with red vinyl grip for opening and closing.

**Closure:** Compression operated, shock absorbing cylinder.

**Latch:** Exterior handle, inside locking handle with interior and exterior padlock hasp.

### Options at Additional Cost:



[LP-4, LP-5, LP6](#), Ladder Posts (see separate submittals for more information)

[Saf-T-Hatch Rooftop Safety Railing](#) - (see separate submittal for more information) **Meets OSHA 1910.23**

**Stainless Steel Hardware:** Hinges, exterior handle, inside locking handle.



QTY	MODEL	CURB OPENING		SHIPPING WEIGHT
		Width	Length	
	RHR-1	30"	36"	137 lbs

 <b>JL INDUSTRIES</b>	 <b>ACTIVAR</b> INC. <small>www.activarcpg.com</small> Construction Products Group	Distributor:	Quantity:
		Contractor:	Approved By:
		Model #:	Architect:
		Project:	Date:

Distributed by: **BEST MATERIALS®** Ph: 800-474-7570, 602-272-8128  
[www.BestMaterials.com](http://www.BestMaterials.com) Email: [Sales@BestMaterials.com](mailto:Sales@BestMaterials.com)