

SUBMITTAL: SAF-T-HATCH™ SAFETY RAIL FOR ROOF OPENINGS

The Saf-T-Hatch Railing can be installed on any manufacturer's roof Hatch. This Patented railing system features a clamping frame that is assembled around the curb base of roof hatch or skylight. This railing does not penetrate the curb or the roof deck - it is designed to protect your roof warranty. Meet OSHA required compliance for safe egress and ingress through all of your rooftop hatch openings while hatch is in use. Complies with OSHA [CFR 29 -1910.23](#) and [CFR 29 - 1910.27](#).

SPECIFICATIONS:

Pipe Rail: 1.66" O.D. galvanized steel tubing.

Tubing Base: 2" x 2" 16 gauge galvanized steel.

Tubing Base Pad: Styrofoam 3/4" thick isolated pad.

Finish: Safety yellow powder coat paint finish

Hardware: Zinc plated threaded rods, caps, nuts, bolts and washers.

Chain: Zinc plated 3/16" ASTM proof coil with hoop and rings as required

Pipe Caps: Plastic inserts, black.

Installation: Quickly installs by a clamping frame around curb base of roof hatch or fire hatch. Does not penetrate the roof deck or require "approved" installer. Fits all brands of existing roof hatches with cap flashing - field adjustable to fit flashing size.

STEP 1 - ENTER QUANTITY AND SELECT MODEL ON PAGE 2


STEP 2 - SELECT OPTIONAL FEATURES AT ADDITIONAL COST:

___ **SHG-2436 [Steel Gate Option](#):** fits roof hatches with opening size from 24" to 36".

___ **-GRAB:** Optional Welded Grab Bar for Models Narrower than 36" (Standard on Models with 36" or greater opening)

Integrated RHG Steel Roof Hatch with Permanent Rail Supports - [See Model RHG-STH.](#)


SHWC-3036 In Stock at One or More of Our Warehouses!

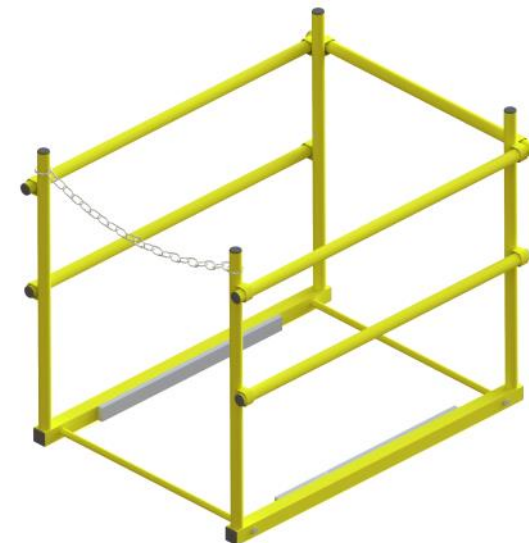

SHWC 3036 RAILING WITH STANDARD ZINC-PLATED CHAIN




SHG-2436 OPTIONAL GATE—SEE SEPARATE SUBMITTAL FOR DETAILS


| | | |
|---|--------------|--------------|
|  ACTIVAR INC. CONSTRUCTION PRODUCTS GROUP SAF-T-HATCH™ IS A TRADEMARK OF ACTIVAR DOWNLOAD THE MOST CURRENT SUBMITTAL BEFORE ORDERING | Distributor: | Quantity: |
| | Contractor: | Approved By: |
| | Model #: | Architect: |
| | Project: | Date: |
| © Activar Construction Products Group, Inc 2017 | | |
| HEADQUARTERS & JL INDUSTRIES: 9702 NEWTON AV S, BLOOMINGTON, MN 55435-5416 PH: 800-554-6077 FAX: 952-835-2218 EMAIL: SALES@ACTIVARCPG.COM WWW.ACTIVARCPG.COM ACPG WEST COAST/SAMSON: COMMERCE, CA WAREHOUSES: DALLAS TX, FORT MYERS FL, LANCASTER PA, ATLANTA GA, CHICAGO, IL, SEATTLE WA, FARGO ND, OMAHA NE, 1/17/2017 | | |

SUBMITTAL: SAF-T-HATCH™ SAFETY RAIL FOR ROOF OPENINGS

| Qty | Model Please note new part # | Curb Opening Length Railing Egress Side | Curb Opening Width | Approx Weight | Fits ACPG Roof Hatch Model | Includes Grab Bar |
|--|------------------------------------|--|--------------------------|------------------|--|-------------------------|
| | SHWC-3036 | 30" | 36" | 66 lbs | RHA/RHG/RHR-1 | N |
| | SHWC-3054 | 30" | 54" | 70 lbs | RHA/RHG-2 | N |
| | SHWC-3096 | 30" | 96" | 80 lbs | RHA/RHG-3 | N |
| | SHWC-3636* | 36" | 36" | 68 lbs | RHA/RHG-4 | Y |
| | SHWC-4848* | 48" | 48" | 75 lbs | RHA/RHG-5 | Y (2) |
| NEW STANDARD SIZES NOW AVAILABLE BELOW! | | | | | | |
| Qty | Model | Curb Opening Length Railing Egress Side | Curb Opening Width | Approx Weight | Fits Roof Hatch with Outside Curb Dimensions Length x Width | Includes Grab Bar |
| | SHWC-2424 | 24" | 24" | 55 lbs | 26" x 26" Min 30" x 30" Max | N |
| | SHWC-2430 | 24" | 30" | 60 lbs | 26" x 32" Min 30" x 36" Max | N |
| | SHWC-2436 | 24" | 36" | 60 lbs | 26" x 38" Min 30" x 42" Max | N |
| | SHWC-2496 | 24" | 96" | 75 lbs | 26" x 98" Min 30" x 102" Max | N |
| | SHWC-3030 | 30" | 30" | 65 lbs | 32" x 32" Min 36" x 36" Max | N |
| | SHWC-3648* | 36" | 48" | 70 lbs | 38" x 50" Min 42" x 54" Max | Y |
| | SHWC-3696* | 36" | 96" | 90 lbs | 38" x 98" Min 42" x 102" Max | Y |

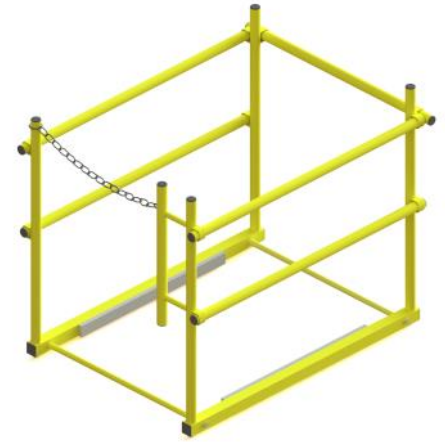

SHWC3636 SHOWN WITH STANDARD GRAB BAR
(Standard with 36" and Greater Models)

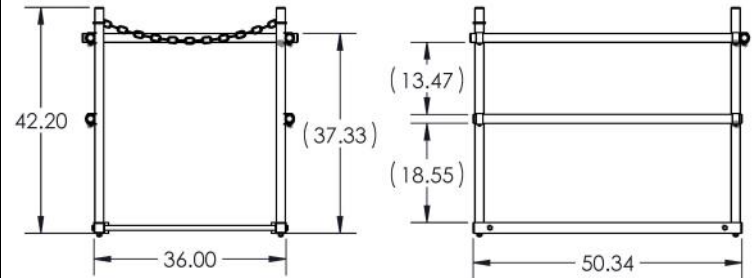

End View

Side View

* Models that include grab bar SHWC-3636, SHWC-4848, SHWC-3648, SHWC-3696

CUSTOM SIZES AVAILABLE UPON REQUEST:

Outside Curb Dimension Egress Side: _____

Outside Curb Dimension Hinge Side: _____