



# RUBBER PAVERS

## SYSTEM ACCESSORIES

### RUGGED, SHOCK-ABSORBING, RESISTANT TRAFFIC SURFACE

Versico Rubber Pavers, designed to meet Versico's demanding specifications, are 2" thick and available in 2' x 2' dimensions.


Manufactured completely from recycled tires, they provide an innovative and environmentally-friendly solution to used tire disposal problems. Versico Pavers protect the membrane on Versico Roofing Systems and can be used on plaza decks, terraces, walking or jogging tracks and patios. These rooftop pavers provide a resilient, shock-absorbing, weather-resistant traffic surface and complement any roofing system application. They are available in two colors: black and terra cotta.

Versico Rubber Pavers are compatible with EPDM membranes and do not require installation of protective mats. Tiles lock together and provide multi-directional drainage patterns. VersiGard® Rubber Paver System utilizes 45- or 60-mil thick VersiGard non-reinforced or reinforced EPDM membrane. Insulation and the membrane are loose-laid over the substrate and the membrane sheets are seamed together with primer, seam adhesive, In-Seam Sealant and Lap Sealant or VersiGard Primer and QA Tape.

The pavers are loose-laid over the membrane and offer optimum membrane protection without limiting accessibility to the membrane. The VersiGard Rubber Paver System is ideal for roofs that require snow removal or those prone to heavy maintenance traffic.



Versico Rubber Pavers are available in black and terra cotta.

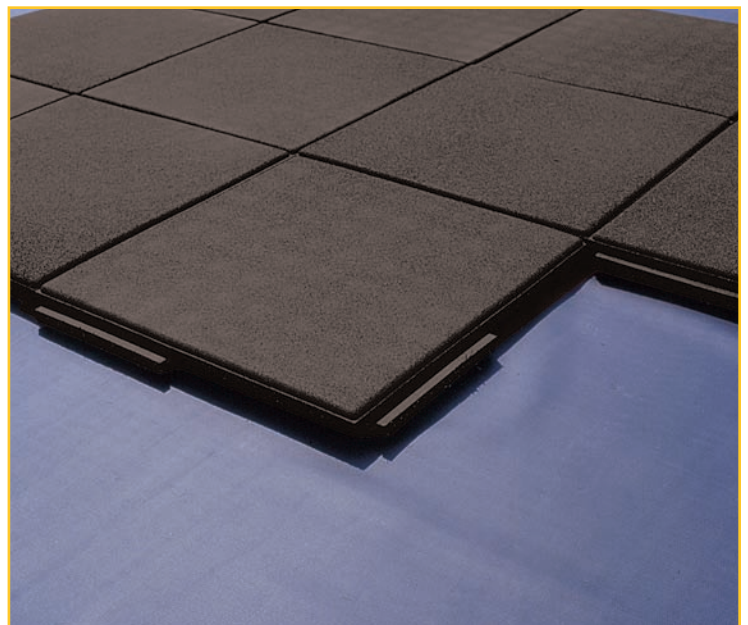

Interlocking Pavers

Distributed by: **BEST MATERIALS LLC, Phoenix AZ**  
 Ph: 800-474-7570, 602-272-8128 Fx: 602-272-8014  
[www.BestMaterials.com](http://www.BestMaterials.com) Email: [Sales@BestMaterials.com](mailto:Sales@BestMaterials.com)



*A subsidiary of Carlisle SynTec Incorporated*

**Versico Incorporated** PO Box 1289, Carlisle, PA 17013



# RUBBER PAVERS

## SYSTEM ACCESSORIES

### FEATURES & BENEFITS

- Rubber Pavers are compatible with EPDM membrane and don't require a protective mat
- Stable through freeze/thaw cycles
- Molded "U" shaped channel configuration, along with 100% solids polyurethane adhesive, make it possible to lock tiles together
- Very lightweight compared to concrete pavers
- No breakage concerns in delivery or handling
- Multi-directional drainage pattern
- Standard colors are black and terra cotta
- Easy two-sided attachment

### CAUTIONS AND WARNINGS

1. Clear the membrane of all dirt and debris prior to installing the VersiGard Rubber Pavers.
2. Polyurethane adhesive must be stored above 50°F (10°C) make it possible

### INSTALLATION

Review current Versico specifications and details for specific application requirements.



Close-up of the Versico Rubber Paver locking technology.

## TECHNICAL SPECIFICATIONS Versico Rubber Pavers

### Typical Properties & Characteristics

Physical Property	Test Method	Typical Characteristics
Dimensions @ 78°F (26°C)	—	24" x 24" ± ¼"
Weight	—	6 lbs./sq.ft.
Wear Surface Density	ASTM D 792	60 lbs./cu.ft.
Tensile Strength	ASTM D 412	107 psi
Elongation at break	ASTM D 412	165%
Tear Resistance	ASTM D 624	33 lbs./in.
Abrasion Testing, Taber Abrader 1000 g wt., 2000 cycles H-21 wheel	ASTM D 3389	.75 g loss
Resistance to Outdoor Ultraviolet Weathering	Xenon Arc, 500 hrs exposure 178°F (81°C), 50% relative humidity	85% tensile retention 100% elongation retention
Burning Pill Test	ASTM D 2859	Pass
Freeze/Thaw Cycling	RMA Weathering Cycle RP-10	No breakdown, cracking or loss of flexibility in 4 Cycles