



This heavy-duty wide crown stapler is capable of handling a variety of applications. Constructed of durable, high-quality, high-strength materials, the WC150XP is designed for extreme performance and long life.

Applications:

Wire lathing, corrugated carton to skid, butt-joints and furniture/cabinet frames, foam insulation board.

Features and Benefits:


- Robust firing valve design makes the tool fast, powerful, efficient, and easy to maintain
- Positive-locking adjustable depth of drive ensures consistently flush drives and helps prevent over-drives
- Aggressively tapered body allows for an improved line of sight for better shot accuracy
- Rotating belt hook makes the tool easily stowable and portable
- EZ clear latch provides easy access to clear fasteners
- High-strength composite magazine and metal magazine guide prevents wear and helps eliminate skipping, jams, and misfires
- Large 3/8" inlet for increased air flow during high volume usage
- Durable deflector cap for superior impact resistance

Specifications:

Item#: 4W0001N
 Reg. Operating Pressure: 70-120 psi (4.8 - 8.3 bar)
 Air Inlet: 3/8" NPT
 Tool Weight: 4.9 lbs (2.23 kg)
 Height: 9" (229 mm)
 Length: 15 1/4" (387.5 mm)
 Width: 3 3/4" (95.2 mm)
 Fastener Capacity: 160

Fastener Specifications:

Gauge: 16
 Crown: 1"
 Fastener Range: 5/8" – 1 1/2" (16 mm - 38 mm)
 Collation Angle: Straight
 Finish: All 16 Gauge 1" Crown Staples in Range

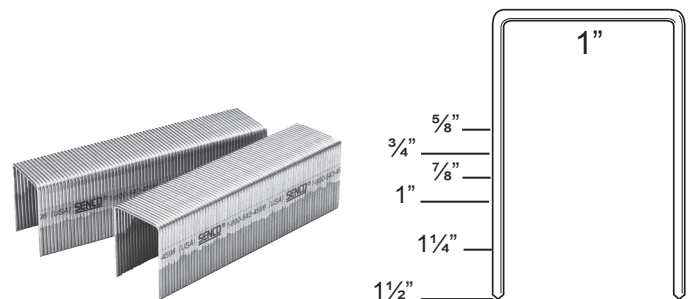

SENCO® 16 Ga. 1" Crown Heavy Wire

Length	Item Code	Carton Count	Point	Finish	Coating
5/8"	P10BAB	10.M	Chisel	Galv	Sencote
5/8"	P10FAB	10.M	Divergent	Galv	Sencote
3/4"	P11BAB	10.M	Chisel	Galv	Sencote
7/8"	P12BAB	10.M	Chisel	Galv	Sencote
1"	P13BAB	10.M	Chisel	Galv	Sencote
1 1/4"	P15BAB	10.M	Chisel	Galv	Sencote
1 1/2"	P17BAB	10.M	Chisel	Galv	Sencote
5/8"	P10BABB	10.M	Chisel	Galv	Sencote
3/4"	P11BABB	10.M	Chisel	Galv	Sencote
7/8"	P12BABB	10.M	Chisel	Galv	Sencote
1"	P13BABB	10.M	Chisel	Galv	Sencote
1 1/4"	P15BABB	10.M	Chisel	Galv	Sencote
1 1/2"	P17BABB	10.M	Chisel	Galv	Sencote
5/8"	P10BPE	10.M	Chisel	Galv	Coated
3/4"	P11BPE	10.M	Chisel	Galv	Coated
1"	P13BGBN	5.M	Outside Chisel	Stainless	Sencote

Robust firing valve

Fast, powerful, easy to maintain & operate

Aggressively tapered body

Improved line of sight & accuracy

Rotating belt hook

Stowable & Portable

3/8" Inlet

Increased air flow



Consistently flush drives

Tool free, locking depth of drive

High-strength composite magazine with metal fastener guide

Prevents wear and helps eliminate skipping, jams and misfires

*Choose the right actuation mode!

Sequential Actuation (also known as restrictive trigger or trigger fire) operates in the following sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

Contact Actuation (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.

Always read the Operators Manual and Safety Instructions with all tool to ensure proper use and safety precautions. For additional information on trigger systems and how Senco will save you time, reduce costs and increase quality, call our toll-free Action Line: 800-543-4596, or visit our website at: www.senco.com