


The holding power of screws—the productivity of a nail gun.



Flat-head 2/3 coarse-thread screw
#2 square drive
Sharp point
W72 Magni 599 coated, waxed
WTDC8212 #8 x 2-1/2"

*For attaching roof tile to wood.
Meets or exceeds ASTM 641 Class 1.
Meets Miami-Dade County, Florida,
Protocol PA114-95, Appendix E,
Section 2 (ASTM G85).*

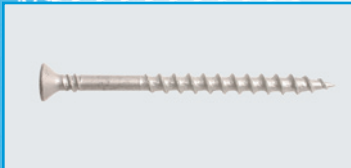

Flat-head, 2/3 coarse-thread screw
#2 square drive
Type 17 point
Yellow zinc plated, waxed
WDYZ8212 #8 x 2-1/2"

*For attaching roof tile to wood.
Type 17 point improves
penetration of tile.*




Flat-head 2/3 coarse-thread screw
#2 square drive
Sharp point
Yellow zinc plated, waxed
WTYZ8212 #8 x 2-1/2"

*For attaching roof tile to wood.
Meets or exceeds ASTM 641 Class 1*



Flat-head 2/3 coarse-thread screw
#2 square drive
Sharp point
W72 Magni 599 coated, waxed
WCCH8212 #8 x 2-1/2"

*For attaching roof tile to wood.
Meets or exceeds ASTM 641 Class 1.
Meets Miami-Dade County, Florida,
Protocol PA114-95, Appendix E,
Section 2 (ASTM G85).*

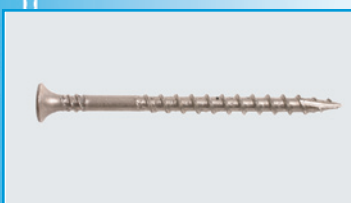

**Stainless steel, bugle-head
2/3 coarse-thread screw**
#2 square drive
Type 17 point
Waxed
WDSB8212 #8 x 2-1/2"

*For attaching roof tile to wood.
Type 17 point improves penetration of
tile. Meets Miami-Dade County, Florida,
Protocol PA114-95, Appendix E, Section
2 (ASTM G85).*

*Additional screws
available upon request*

Florida building codes call for two nails or one screw per tile. Screws hold better. Sharp points pierce glaze. Positive-placement tool design makes work fast and accurate. Reduce broken tiles with PAM's precise control of screw countersinking.

The PAM auto-feed screw system offers high productivity for every application:

- High quality, contractor tough
- 50 screws per strip
- Reversible belt-faster reloads
- Positive advance with any screw size, 5/8" to 3"
- Positive-placement, open-nose design aids screw placement
- Saves time
- Improves quality
- Reduces callbacks
- Reduces operator fatigue
- Protects your reputation

W72 Magni 599 is an acid-resistant, pore-sealing agent chosen to resist corrosive elements.

- Resistant up to 1,500 hours of Salt Spray Test ASTM B-117
- Resistant up to 20 cycles of Acid Rain Test DIN 50018, SFW 2.0L

Pamfast screws fit: Hilti, Makita, Grabber, Senco, and Milwaukee tools.

PAM FASTENING TECHNOLOGY, INC.

800-699-2674

e-mail sales@pamfast.com

www.pamfast.com

