


Distributed by: BEST MATERIALS LLC, Phoenix AZ
Ph: 800-474-7570, 602-272-8128 Fx: 602-272-8014
www.BestMaterials.com Email: Sales@BestMaterials.com

**OSHA PERIMETER MARKER
(Exceeds Required 500 lb Break Strength)**

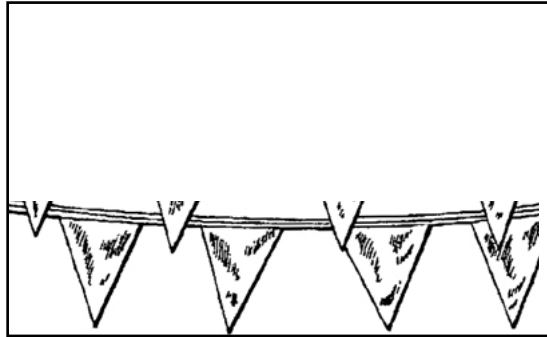

Required by OSHA for perimeter marking of above ground construction areas, flat roof jobs and upper level construction

Our 100' string of 9" x 12" (48 flags per string) pennants exceeds the 500# required break strength.

Property	Specifications Test Method	Avg. Min. Value
Material (Body)		HDPE
Material (Interior)		PP TAPE
Mil Thickness (Body)	ASTM-D-4453	4 Mil
Color	M I Q.A Q2105	OPAQUE
Yellow		
Break Strength (Tensile)	ASTM-D-412	590 PSI
Shipping Unit:	Carton of (10) 105' Strands	
Shipping Weight:	11 lbs. Carton	