


*Open End, Dome Head* **Stainless** Rivet with **Stainless** Mandrel  
 (304) (304)

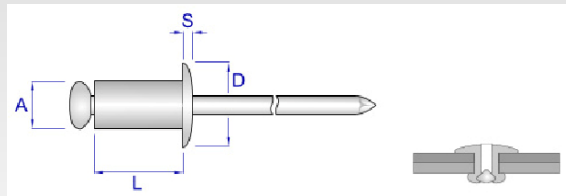

Part #	(A) Rivet Dia	(L) Rivet Length	(D) Flg Dia	(S) Head Height	Grip Range	Shear Strength	Tensile Strength	Drill Bit Size	Box Qty	Box Weight
GR-STSS41	1/8	.212	.250	.040	1/32 - 1/16	420 lbs	530 lbs	#30	10,000	
GR-STSS42	1/8	.275	.250	.040	1/16 - 1/8	420 lbs	530 lbs	#30	10,000	30 lbs
GR-STSS43	1/8	.337	.250	.040	1/8 - 3/16	420 lbs	530 lbs	#30	10,000	
GR-STSS44	1/8	.400	.250	.040	3/16 - 1/4	420 lbs	530 lbs	#30	10,000	33 lbs
GR-STSS45	1/8	.462	.250	.040	1/4 - 5/16	420 lbs	530 lbs	#30	10,000	
GR-STSS46	1/8	.525	.250	.040	5/16 - 3/8	420 lbs	530 lbs	#30	10,000	
GR-STSS48	1/8	.650	.250	.040	3/8 - 1/2	420 lbs	530 lbs	#30	10,000	41 lbs
GR-STSS410	1/8	.775	.250	.040	1/2 - 5/8	420 lbs	530 lbs	#30	8,000	
GR-STSS52	5/32	.300	.312	.050	1/32 - 1/8	650 lbs	820 lbs	#20	8,000	36 lbs
GR-STSS53	5/32	.362	.312	.050	1/8 - 3/16	650 lbs	820 lbs	#20	8,000	
GR-STSS54	5/32	.425	.312	.050	3/16 - 1/4	650 lbs	820 lbs	#20	8,000	44 lbs
GR-STSS55	5/32	.487	.312	.050	1/4 - 5/16	650 lbs	820 lbs	#20	8,000	
GR-STSS56	5/32	.550	.312	.050	5/16 - 3/8	650 lbs	820 lbs	#20	6,000	41 lbs
GR-STSS58	5/32	.675	.312	.050	3/8 - 1/2	650 lbs	820 lbs	#20	6,000	
GR-STSS510	5/32	.800	.312	.050	1/2 - 5/8	650 lbs	820 lbs	#20	6,000	
GR-STSS512	5/32	.925	.312	.050	5/8 - 3/4	650 lbs	820 lbs	#20	5,000	
GR-STSS62	3/16	.325	.375	.060	1/32 - 1/8	950 lbs	1200 lbs	#11	5,000	39 lbs
GR-STSS63	3/16	.387	.375	.060	1/8 - 3/16	950 lbs	1200 lbs	#11	5,000	
GR-STSS64	3/16	.450	.375	.060	3/16 - 1/4	950 lbs	1200 lbs	#11	5,000	43 lbs
GR-STSS65	3/16	.513	.375	.060	1/4 - 5/16	950 lbs	1200 lbs	#11	5,000	
GR-STSS66	3/16	.575	.375	.060	5/16 - 3/8	950 lbs	1200 lbs	#11	5,000	47 lbs
GR-STSS68	3/16	.700	.375	.060	3/8 - 1/2	950 lbs	1200 lbs	#11	4,000	42 lbs
GR-STSS610	3/16	.825	.375	.060	1/2 - 5/8	950 lbs	1200 lbs	#11	4,000	
GR-STSS612	3/16	.950	.375	.060	5/8 - 3/4	950 lbs	1200 lbs	#11	4,000	
GR-STSS614	3/16	1.075	.375	.060	3/4 - 7/8	950 lbs	1200 lbs	#11	3,000	
GR-STSS616	3/16	1.200	.375	.060	7/8 - 1	950 lbs	1200 lbs	#11	3,000	
GR-STSS84	1/4	.500	.500	.080	1/32 - 1/4	1700 lbs	2100 lbs	F	2,000	33 lbs
GR-STSS86	1/4	.625	.500	.080	1/4 - 3/8	1700 lbs	2100 lbs	F	2,000	38 lbs
GR-STSS88	1/4	.750	.500	.080	3/8 - 1/2	1700 lbs	2100 lbs	F	2,000	38 lbs
GR-STSS810	1/4	.875	.500	.080	1/2 - 5/8	1700 lbs	2100 lbs	F	2,000	
GR-STSS812	1/4	1.000	.500	.080	5/8 - 3/4	1700 lbs	2100 lbs	F	2,000	
GR-STSS814	1/4	1.125	.500	.080	3/4 - 7/8	1700 lbs	2100 lbs	F	1,500	

Conform to IFI-114 Grade 51 Standards  
 Compliant to RoHS Standards  
 ISO 9001:2000