


*Open End, Dome Head*

*Steel Rivet with Steel Mandrel*

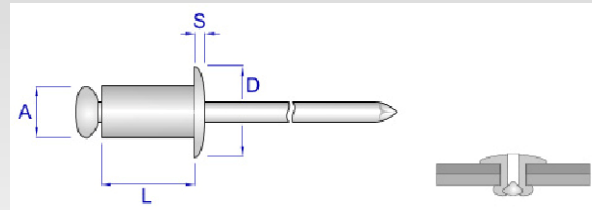

Part #	(A) Rivet Dia	(L) Rivet Length	(D) Flg Dia	(S) Head Height	Grip Range	Shear Strength	Tensile Strength	Drill Bit Size	Box Qty	Box Weight
GR-SS32	3/32	.250	.188	.032	1/32 - 1/8	130 lbs	170 lbs	#41	20,000	
GR-SS34	3/32	.375	.188	.032	1/8 - 1/4	130 lbs	170 lbs	#41	20,000	
GR-SS36	3/32	.500	.188	.032	1/4 - 3/8	130 lbs	170 lbs	#41	20,000	
GR-SS41	1/8	.212	.250	.040	1/32 - 1/16	260 lbs	310 lbs	#30	10,000	
GR-SS42	1/8	.275	.250	.040	1/16 - 1/8	260 lbs	310 lbs	#30	10,000	33 lbs
GR-SS43	1/8	.337	.250	.040	1/8 - 3/16	260 lbs	310 lbs	#30	10,000	
GR-SS44	1/8	.400	.250	.040	3/16 - 1/4	260 lbs	310 lbs	#30	10,000	37 lbs
GR-SS45	1/8	.462	.250	.040	1/4 - 5/16	260 lbs	310 lbs	#30	10,000	
GR-SS46	1/8	.525	.250	.040	5/16 - 3/8	260 lbs	310 lbs	#30	10,000	41 lbs
GR-SS48	1/8	.650	.250	.040	3/8 - 1/2	260 lbs	310 lbs	#30	10,000	45 lbs
GR-SS410	1/8	.775	.250	.040	1/2 - 5/8	260 lbs	310 lbs	#30	8,000	
GR-SS412	1/8	.901	.250	.040	5/8 - 3/4	260 lbs	310 lbs	#30	6,000	
GR-SS52	5/32	.300	.312	.050	1/32 - 1/8	370 lbs	470 lbs	#20	8,000	42 lbs
GR-SS53	5/32	.362	.312	.050	1/8 - 3/16	370 lbs	470 lbs	#20	8,000	
GR-SS54	5/32	.425	.312	.050	3/16 - 1/4	370 lbs	470 lbs	#20	8,000	48 lbs
GR-SS55	5/32	.487	.312	.050	1/4 - 5/16	370 lbs	470 lbs	#20	8,000	
GR-SS56	5/32	.550	.312	.050	5/16 - 3/8	370 lbs	470 lbs	#20	6,000	38. lbs
GR-SS58	5/32	.675	.312	.050	3/8 - 1/2	370 lbs	470 lbs	#20	6,000	
GR-SS510	5/32	.800	.312	.050	1/2 - 5/8	370 lbs	470 lbs	#20	6,000	
GR-SS512	5/32	.925	.312	.050	5/8 - 3/4	370 lbs	470 lbs	#20	5,000	
GR-SS62	3/16	.325	.375	.060	1/32 - 1/8	540 lbs	680 lbs	#11	5,000	38 lbs
GR-SS63	3/16	.387	.375	.060	1/8 - 3/16	540 lbs	680 lbs	#11	5,000	
GR-SS64	3/16	.450	.375	.060	3/16 - 1/4	540 lbs	680 lbs	#11	5,000	42 lbs
GR-SS65	3/16	.513	.375	.060	1/4 - 5/16	540 lbs	680 lbs	#11	5,000	
GR-SS66	3/16	.575	.375	.060	5/16 - 3/8	540 lbs	680 lbs	#11	5,000	46 lbs
GR-SS68	3/16	.700	.375	.060	3/8 - 1/2	540 lbs	680 lbs	#11	4,000	46 lbs
GR-SS610	3/16	.825	.375	.060	1/2 - 5/8	540 lbs	680 lbs	#11	4,000	54 lbs
GR-SS612	3/16	.950	.375	.060	5/8 - 3/4	540 lbs	680 lbs	#11	4,000	58 lbs
GR-SS614	3/16	1.075	.375	.060	3/4 - 7/8	540 lbs	680 lbs	#11	3,000	
GR-SS616	3/16	1.200	.375	.060	7/8 - 1	540 lbs	680 lbs	#11	3,000	
GR-SS84	1/4	.500	.500	.080	1/32 - 1/4	1000 lbs	1240 lbs	F	2,000	33 lbs
GR-SS86	1/4	.625	.500	.080	1/4 - 3/8	1000 lbs	1240 lbs	F	2,000	38 lbs
GR-SS88	1/4	.750	.500	.080	3/8 - 1/2	1000 lbs	1240 lbs	F	2,000	40 lbs
GR-SS810	1/4	.875	.500	.080	1/2 - 5/8	1000 lbs	1240 lbs	F	2,000	41 lbs
GR-SS812	1/4	1.000	.500	.080	5/8 - 3/4	1000 lbs	1240 lbs	F	2,000	
GR-SS814	1/4	1.125	.500	.080	3/4 - 7/8	1000 lbs	1240 lbs	F	1,500	
GR-SS816	1/4	1.250	.500	.080	7/8 - 1	1000 lbs	1240 lbs	F	1,500	

*Conform to IFI-114 Grade 30 Standards  
 Compliant to RoHS Standards  
 ISO 9001:2000*