

## Framing Nails – Paper Tape

### 31°–34° Paper Tape, Clipped Head, Ring-Shank Nail


#### Features:

- Smooth head
- Annular ring-shank increases withdrawal resistance to provide a secure attachment
- Choose Type 316 stainless steel for seaside applications and superior corrosion resistance

#### Compatible Pneumatic Tools

If you don't see your particular model in the table below, see [strongtie.com/toolmatrix](http://strongtie.com/toolmatrix) or call Simpson Strong-Tie for assistance with fastener selection (800) 999-5099.

Bosch®	SN350-34C
Bostitch®	F33PT
DeWalt®	D51825, D51822
Grip-Rite®	GRTFC83 (up to 3¼"), GRTCH350
Hitachi®	NR83AA3 (up to 3¼"), NR90ADPR, NR90GC2
Makita®	AN943
Max®	SN883CH/34 (up to 3¼"), SN890CH/34
Paslode®	PF350S, CF325 (up to 3¼"), F350S, 900420 (up to 3¼")
Porter Cable®	FC350A
Ridgid®	R350CHA
Senco®	SN901XP (up to 3¼"), SN951XP, GT90CH, FramePro601, FramePro701XP

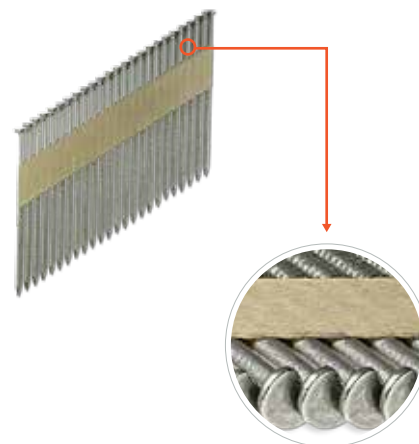

#### Type 316 Stainless Steel

Penny Size	Length (in.)	Shank Diameter (in.)	Carton Quantity	Model No.
8d	2¾	0.113	1,000	T12A237T31
10d	3	0.120	1,000	T11A300T31
12d	3¼	0.131	1,000	T10A325T31

#### Type 304 Stainless Steel

Penny Size	Length (in.)	Shank Diameter (in.)	Carton Quantity	Model No.
6d	2	0.113	1,000	S12A200T31
8d	2¾	0.113	1,000	S12A237T31
10d	3	0.120	1,000	S11A300T31
12d	3¼	0.131	1,000	S10A325T31
16d	3½	0.131	1,000	S10A350T31

These products are subject to quantities on hand, or may require special-order, minimum order quantities and longer lead times. Call Simpson Strong-Tie for details.