

U-Flow® Screwdriver

PRODUCT DATA SPECIFICATIONS

PRODUCT DESCRIPTION

The U-Flow® Screwdriver is an accessory product used in the installation products with the U-Flow Seal. The extra long screwdriver is fitted with a square socket tip (#2 Robertson) for tightening the special recess head screws on the U-Flow compression seals. The 12½-in. shaft of the screwdriver ensures ease of reach when tightening the U-Flow Seal connection screws on all U-Flow retrofit products. The U-Flow screwdriver comes complete with a loss prevention bar.

FEATURES & BENEFITS

- Extra long driver makes it easy to reach the seal screws inside the stem.
- Loss prevention bar keeps screwdriver from falling into the drain leader.
- Available for custom length stems.

APPLICATION

The U-Flow Screwdriver is used to install OlyFlow® RetroDrains, which are designed to replace existing drains in reroofing applications. Installed from the roof surface, OlyFlow RetroDrains are engineered to be installed without removing the existing plumbing or fixture while providing a watertight connection to the roof system and the existing plumbing.


HOW TO INSTALL A U-FLOW SEAL

STEP 1 – Simply insert the narrow end of the U-Flow Seal into the bottom of the drain stem.


STEP 2 – Using the U-Flow Screwdriver, tighten the seal's screws, accessible through the top of the drain, until seal expands and locks to the drain stem.

STEP 3 – Place the drain with attached seal inside the existing drain pipe.

STEP 4 – Tighten the seal screws in sequence, in order to provide uniform compression of the seal's compressing ring (the lowest part on the seal). Screws should be tightened with a few turns each, one by one. This procedure should be repeated until screws are hand-tight and no vertical movement of the drain is possible. U-Flow 3-in. and 4-in. seals have three (3) screws each, while U-Flow 5-in. and 6-in. seals have four (4) screws each. The order of tightening is shown below.

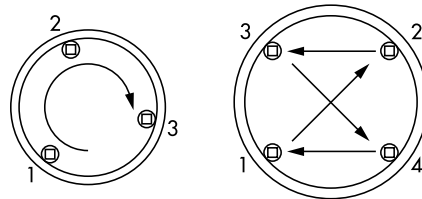

**For technical assistance contact
 OMG at 800-633-3800.**

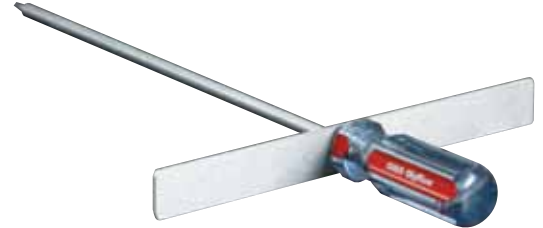

PHYSICAL DATA

The data below is constant for each U-Flow Screwdriver.

SHAFT LENGTH	DRIVE
12½"	Square socket (#2 Robertson)

ORDERING INFORMATION

CAT. NO.	PKG	WEIGHT
UADR	Each	1 lb.

RP1173C Rev. 1111