

#2-Vent Master Flash[®]




Accommodates **2" - 2-3/4" (50 - 70mm) pipes**

ISO Quality, Price & Availability / TWO COMPOUNDS

	EPDM	SILICONE
ADVANCED OZONE RESISTANCE tested to...	70 hour @ 500 pphm	70 hour @ 500 pphm
HIGH TEMPERATURE RESISTANCE		
Tested to		
Intermittent	+135°C (+275°F)	+260°C (+500°F)
Continuous	+100°C (+212°F)	+225°C (+437°F)
LOW TEMPERATURE RESISTANCE tested to...	-55°C (-67°F)	-74°C (-101°F)
COMPRESSION SET minimum...	25%	50%

*Complete specification data and testing methods are available upon request.

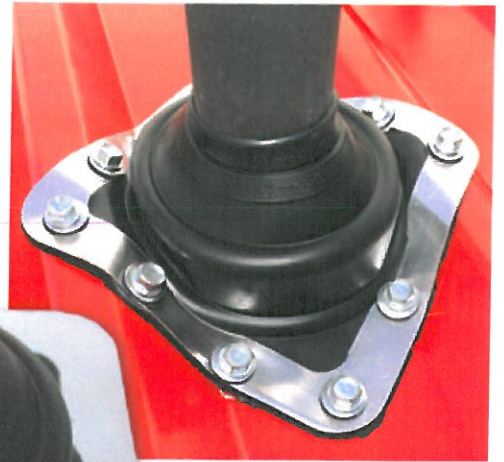

Weather Protection
Made of E.P.D.M. or Silicone, these flashings are compounded specifically for maximum resistance to weathering due to ozone and ultraviolet light.



Adaptable Base
The base is designed to mold to most panel configurations and roof pitches regardless of pipe location.



Pipe diameters can be seen clearly for proper fitting.

Pipe Range	Compound	Part No.		Flashing Details	
#2-VENT 2" - 2-3/4" 50 - 70mm	Black EPDM	SV101BA		A-Top Opening Diameter	2" - 2-3/4" (50 - 70mm)
	Grey EPDM	SV101GA		B-Overall Height	2-1/2" (63.5mm)
	Silicone	SV102RA		C-Base Diameter	6" (152.4mm)

To see our complete product line go to www.aztecwasher.com

