



DOUBLE LEAF SMOKE VENT: UFV Series
UL-LISTED




Certifications: UL Listed. The smoke vents are equipped with a UL listed 165° F fusible link for automatic operation.

Construction: Covers are 11 gauge aluminum insulated with fiberglass, 14 gauge galvanized steel curb and curb frame fully welded and ground smooth, gasketed and insulated for weather tightness.

Operation: Torsion spring drives open the covers automatically. Shock absorbers control the speed of the leaves as they open. The fusible link can be quickly and easily replaced.

Hardware: Heavy gauge aluminum 3/16" pivot hinges. Pull handles are provided for exterior or interior manual operation.

Finish: 2 coats of factory-applied primer.

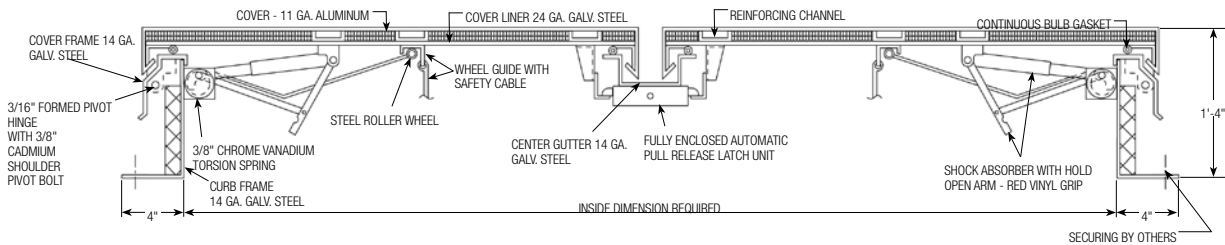

Clear Opening Size	48" x 48"	48" x 72"	48" x 90"	48" x 96"	60" x 60"	60" x 96"			
UL-Listed	UFV-1	UFV-2	UFV-3	UFV-4	UFV-5	UFV-6			
Custom Sizes Available Upon Request • Fusible Links with Higher Temperature UL-Listings Available Upon Request									

DOUBLE LEAF DOMED SMOKE VENT: UDFV Series


Certifications: The smoke vents are equipped with a UL listed 165° fusible link for automatic operation.

Construction: Dome frame is a minimum thickness of .072 aluminum and provides a self-contained sloping condensation and weepage gutter for drainage. Covers are one-piece acrylic dome (either white translucent or clear). The 14 gauge galvanized steel dome retaining frame is secured to the 14 gauge galvanized steel curb frame. The galvanized steel curb and curb frame are fully welded and ground smooth, gasketed and, insulated for weather tightness.

Operation: Torsion spring drives open the covers automatically. Shock absorbers control the speed of the leaves as they open. The fusible link can be quickly and easily reset and a new link inserted.

Hardware: Heavy gauge aluminum 3/16" pivot hinges. Pull handles are provided for exterior or interior manual operation.

Finish: 2 coats of factory-applied primer.

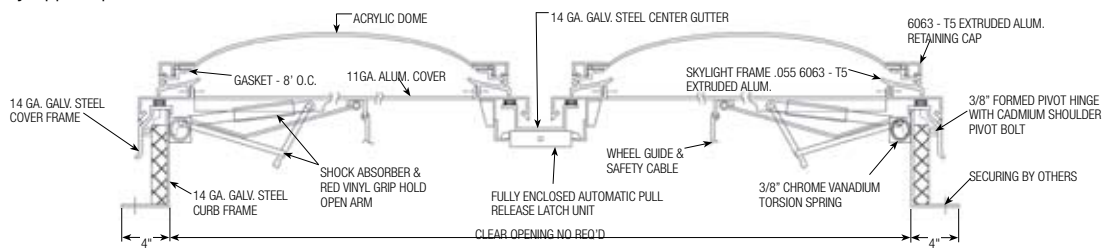

Clear Opening Size	48" x 48"	48" x 72"	48" x 90"	48" x 96"	60" x 60"	60" x 96"			
Model #	UDFV-1	UDFV-2	UDFV-3	UDFV-4	UDFV-5	UDFV-6			
Custom Sizes Available Upon Request • Fusible Links with Higher Temperature UL-Listings Available Upon Request									