

Termination Bars

PRODUCT DATA SPECIFICATIONS

PRODUCT DESCRIPTION

OMG Termination Bar is designed to terminate single-ply membrane at parapet walls and other penetrations. Use the OMG Heavy Duty Fastener or Masonry Anchor to secure the termination bar.

OMG Termination Bar is made of extruded aluminum (6063 T6 alloy) with a mill finish, or Series #304 stainless steel alloy. Oval holes that measure ¼-in. x ¾-in. (6 x 10mm) are punched into each bar, with standard 6-in.,

8-in. or 12-in. (150, 200 or 300mm) on center (o.c.) spacing. OMG Termination Bar can be made to order with special hole spacing.


PACKAGING

All OMG termination bars come in 10-ft. (3.05m) lengths. **Aluminum bar** is packaged in tubes of 50 (500-ft. [152.5m] total). **Stainless steel bar** is packaged in tubes of 10 (100-ft. [31m] total). There are 10 tubes per pallet.

PHYSICAL DATA* & ORDERING INFORMATION

PRODUCT	CAT. NO.	WIDTH	THICKNESS	SPACING IN (MM)	LEG/LIP IN (MM)	WEIGHT LBS (KG)
CHANNEL BAR	CHANB06	1" (25mm)	.100" (2.5mm)	6" (150) o.c.	¼" (6) high top & bottom leg 90° angle	76 lbs. (34.50)
	CHANB08			8" (200) o.c.		
	CHANB12			12" (300) o.c.		
LIP BAR	LIPTB06	¾" (19mm)	.090" (2.3mm)	6" (150) o.c.	¾" (5) wide lip 45° angle	57 lbs. (25.88)
	LIPTB08			8" (200) o.c.		
	LIPTB12			12" (300) o.c.		
FLAT BAR	FLATB06	1" (25mm)	.090" (2.3mm)	6" (150) o.c.	N/A	57 lbs. (25.88)
	FLATB08			8" (200) o.c.		
	FLATB12			12" (300) o.c.		
HEAVY FLAT BAR (Aluminum)	FLATB06-18	1" (25mm)	.125" (3.2mm)	6" (150) o.c.	N/A	74 lbs. (33.60)
	FLATB08-18			8" (200) o.c.		
	FLATB12-18			12" (300) o.c.		
HEAVY FLAT BAR (Stainless Steel)	FLATB06SS	1" (25mm)	.125" (3.2mm)	6" (150) o.c.	N/A	45 lbs. (20.43)

*All sizes are nominal.

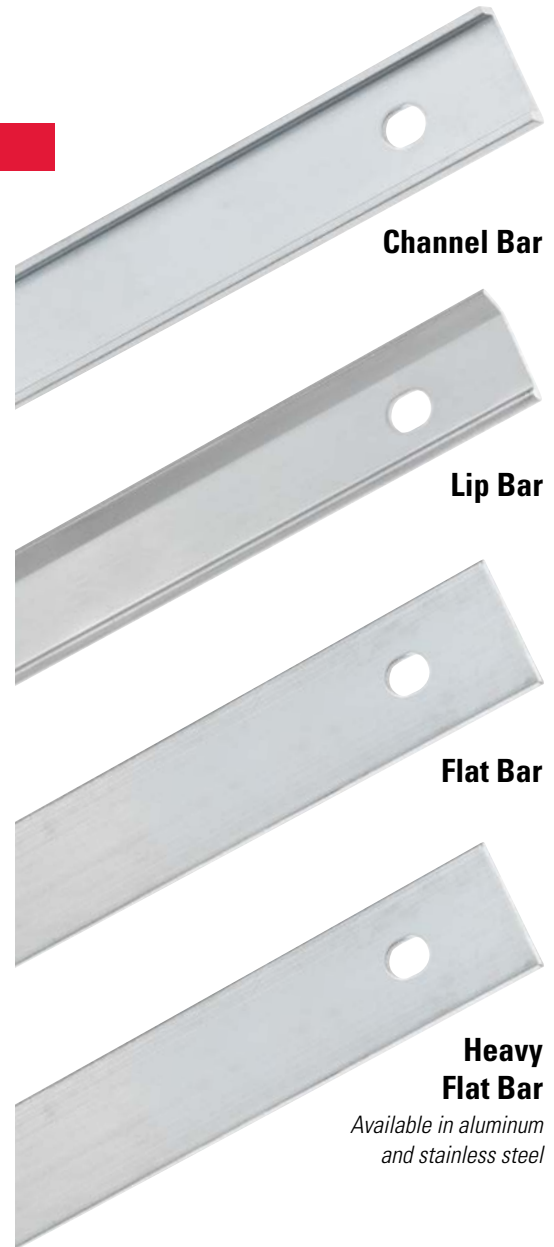

MASONRY ANCHORS

The OMG Masonry Anchor is designed to attach termination bar to concrete or masonry walls. This fastener has a zinc plated steel pin and is available in two diameters, ¼-in. and ¾-in. (6 and 4mm). Lengths range from ⅞-in. to 2-in. (22 to 50mm).

CAT. NO.	PIN DIAMETER	PIN LENGTH	PKG	WEIGHT
MA316	¾" (4mm)	⅞" (22mm)	1000	10 lbs. (4.5kg)
MA034	¼" (6mm)	¾" (19mm)	1000	15 lbs. (6.75kg)
MA001	¼" (6mm)	1" (25mm)	1000	20 lbs. (9kg)
MA114	¼" (6mm)	1¼" (31mm)	1000	22 lbs. (9.9kg)
MA112	¼" (6mm)	1½" (38mm)	1000	25 lbs. (11.25kg)
MA002	¼" (6mm)	2" (50mm)	1000	31 lbs. (13.95kg)

*All sizes are nominal.



Superior productivity.
 Superior performance.