


The holding power of screws—the productivity of a nail gun.



Bugle-head coarse-thread screw

#2 Phillips drive
Sharp point
Black phosphate coating
GCBP6118 #6 x 1-1/8"
GCBP6114 #6 x 1-1/4"
GCBP6158 #6 x 1-5/8"
GCBP7200 #7 x 2"

*For attaching drywall to wood.
Recommend 1" penetration
into substrate.*

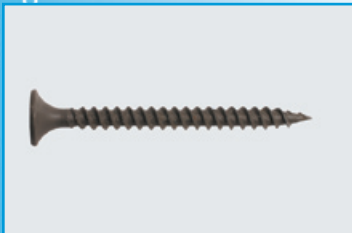

Bugle-head fine-thread screw

#2 Phillips drive
Sharp point
Black phosphate coating
GFBP6114 #6 x 1-1/4"
GFBP6158 #6 x 1-5/8"
GFBP6200 #6 x 2"

*For attaching drywall to 18- to 22-gauge
steel. Recommend 2 or 3 threads
showing through steel. Also ideal for
Dens Glass.*



Bugle-head self-drilling screw

#2 Phillips drive
Self-drilling point
Clear zinc plating
SDCZ6114 #6 x 1-1/4"
SDCZ6158 #6 x 1-5/8"

*For attaching drywall to 16- to 18-gauge
steel. Recommend 2 or 3 threads
showing through steel.*

Additional screws available upon request



The PAM auto-feed screw system offers high productivity for every application:

- High quality, contractor tough
- 50 screws per strip
- Reversible belt—faster reloads
- Positive advance with any screw size, 5/8" to 3"
- Positive-placement, open-nose design aids screw placement
- Saves time
- Improves quality
- Reduces callbacks
- Reduces operator fatigue
- Protects your reputation

Screws are the standard fastener for drywall. Pamfast collated drywall screws make it even easier. Reduce waste, decrease installation time, and reduce risk of finger injury.

Pamfast screws fit: Hilti, Makita, Grabber, Senco, and Milwaukee tools.