



Plasti-Flash Systems


Technical Product Information

New construction flashings for thermoplastic roof systems



Plasti-Flash

Plasti-Flash is a unique flashing product manufactured by Portals Plus for Thermoplastic roofing systems. The base unit is molded of solid white PVC which is specially formulated to withstand ultraviolet degradation, plasticizer migration, and severe temperatures. The Plasti-Flash base is easily welded by means of hot air or solvents as the roof membrane manufacturer recommends. To complete the flashing seal, a white EPDM rubber cap locks on to the base unit by means of the exclusive "Weather-Tite Pressure Seal" which consists of two (2) beads molded into the collar of the base which mate into double grooves inside the EPDM cap. The white EPDM cap is available in a choice of either the C-126 for a single penetration up to 6" or the C-212 for as many four penetrations up to 2". Also available is a Retrofit Plasti-Flash base with a black EPDM SC-36 split Retrofit Cap for single penetrations which can not be disconnected.

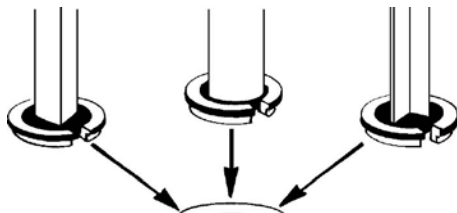

**Available adapters to fit
most Plasti-Flash Flashings
(See adapter ring section for proper sizing)**




Round Adapters
 .5" to 3.5"
 (.25" Increments)




Angle Iron
 1.17", 3", 4"




Square Tube
 3" and 4"

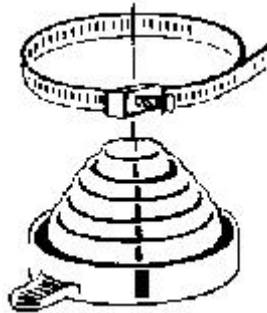

C-126
 1 - 2" TO 6" PIPE

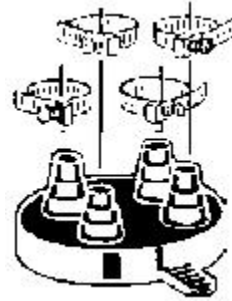

C-212
 2 - .375" TO 1" PIPES
 2 - 1" TO 2" PIPES

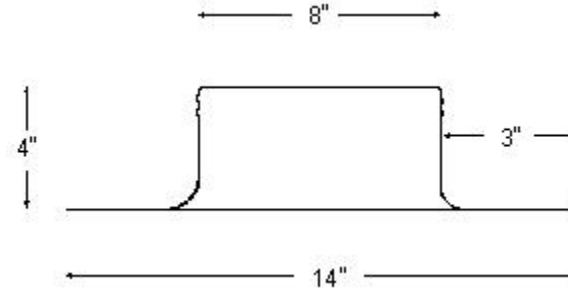

Plasti-Flash Base

[Adapter Rings](#) can modify these penetrations.

NEW UPC PART NUMBER	OLD PART NUMBER	DESCRIPTION	QTY / CTN	LIST PRICE PER UNIT
26015	PF104	PLASTI-FLASH w/ 126 WHITE CAP	5	
26025	PF102	PLASTI-FLASH w/ 212 WHITE CAP	5	
26035	PF500	RETROFIT PLASTI-FLASH w/ SC36 RETROFIT BLACK CAP	5	

Call Customer Service For Price

Distributed by: **BEST MATERIALS LLC**
 Ph: 800-474-7570, 602-272-8128 Fax: 602-272-8014
www.BestMaterials.com Email: Sales@BestMaterials.com