


Distributed by Best Materials LLC  
 For more information call:  
 1-800-474-7570, 602.272.8128  
 Website: <http://www.bestmaterials.com>  
 E-mail: [sales@BestMaterials.com](mailto:sales@BestMaterials.com)

**Best Materials®**

## EPDM Economy Walk Pad

Diamond Plate Embossed Pattern

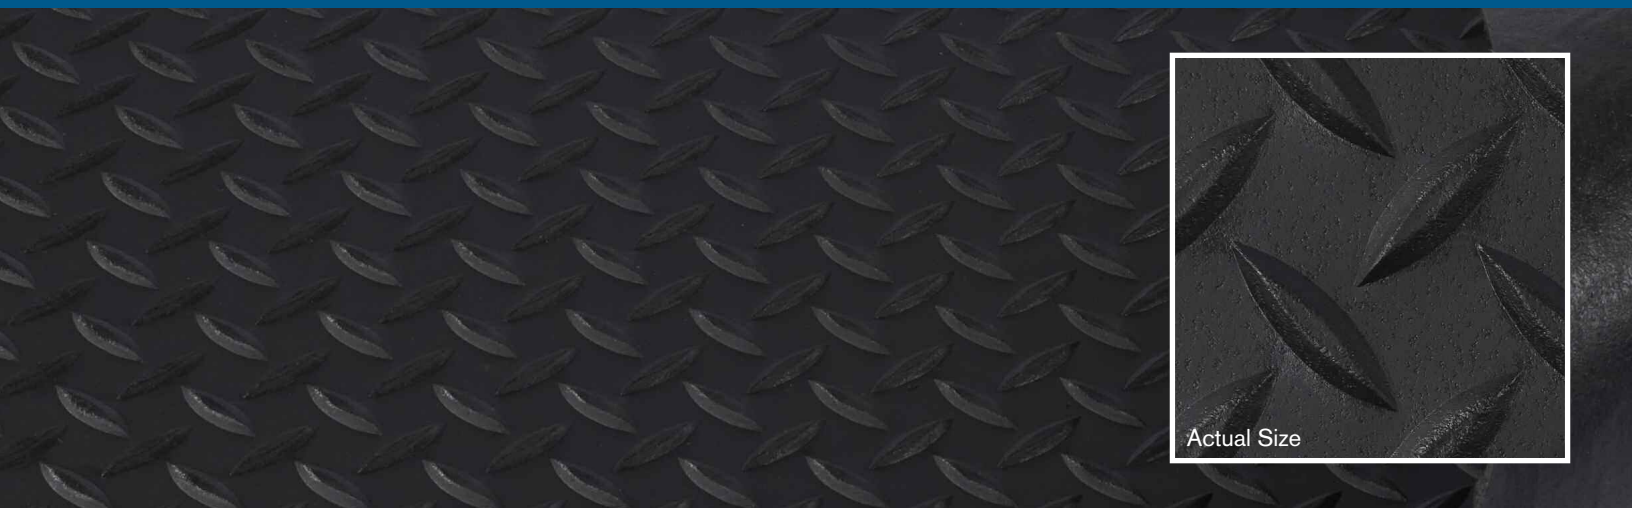

### Recommended for protection of EPDM roof membrane in areas subjected to frequent foot traffic or maintenance.

EPDM roof walkway pads and runners offer a safe, simple, economical method of protecting roofs from damage due to necessary roof traffic. Our embossing patterns provide extra traction while creating a safe pathway for roof top traffic. EPDM roof walkway pads protect roof membranes from repetitive foot traffic accidental tool drops.

#### STANDARD AND METRIC SPECIFICATION – Item #67-6740-56 (Black)

TEST DESCRIPTION	TEST METHOD	STANDARD	METRIC
Thickness, in (mm)	ASTM D 412	0.140" +/- 0.10	3.6 mm +/- .25 mm
Weight per pad, lbs.	TBC method	3.20 lbs. each	1.45 kg each
Width, in (mm)	ASTM D 412	30" +/- ½" max.	76 cm +/- 12.7 mm
Length, in (mm)	ASTM D 412	30" +/- ½" max.	76 cm +/- 12.7 mm
Tensile Strength (M PA)	ASTM D 412	700 PSI	4.8 M PA
Tear Resistance, lb/in (N/mm)	ASTM D 624	200 PPI	35 N/mm
Shore A Hardness	ASTM D 2240	70 +/- 5	
Elongation	ASTM D 412	300%	
Accelerated Weathering	ASTM G 155	Pass @ 5,000 hrs, no cracks	

#### LEED INFORMATION:

Post-Industrial Recycled Content 65%